


## Uponor Wipex coupling PN6 40x3,7-G1 1/4

**1018330**

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

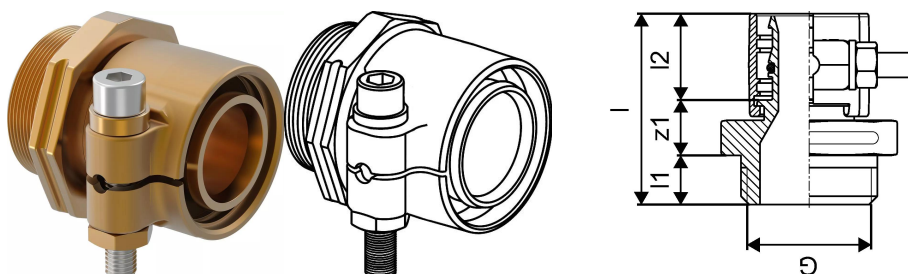

### Application information Uponor Wipex coupling PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.


#### Application

- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN6 40x3,7-G1 1/4  
1018330

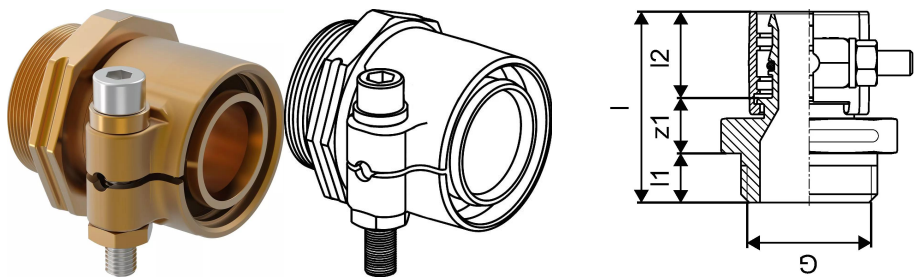

Technical data

|                            |           |
|----------------------------|-----------|
| Item (unit of measurement) | pce       |
| Item no VVS                | 087883040 |
| Item no LVI                | 1932040   |
| Item no NRF                | 8362391   |
| Length (l)                 | 61 mm     |
| Length (l1)                | 16 mm     |
| Length (l2)                | 30 mm     |
| Packaging Quantity PL1     | 1         |
| Packaging Quantity PL3     | 10        |
| Packaging Quantity PL4     | 960       |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com