


## Uponor Wipex coupling PN6 75x6,8-G2

**1018333**

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

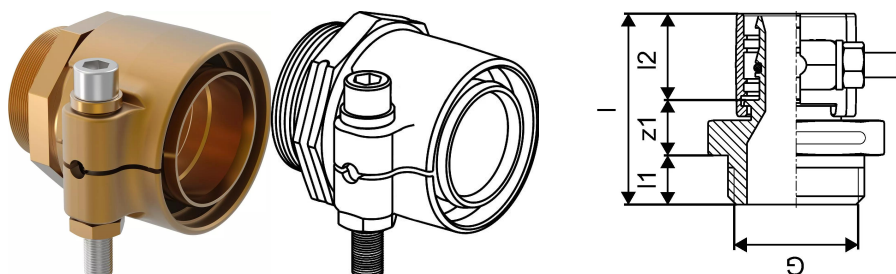

### Application information Uponor Wipex coupling PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN6 75x6,8-G2

1018333

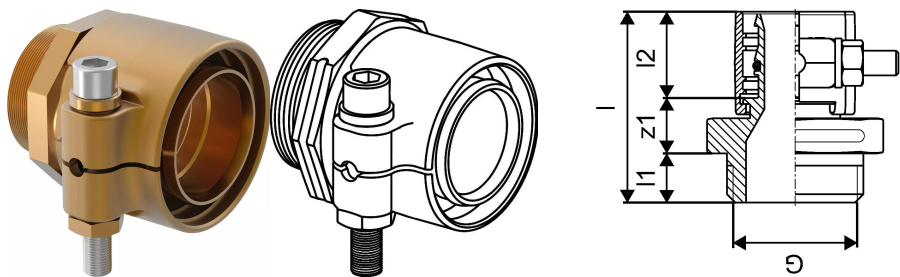

Technical data

Item (unit of measurement)	pce
Item no VVS	087883075
Item no LVI	1932075
Item no NRF	8362394
Length (l)	92 mm
Length (l1)	20 mm
Length (l2)	51 mm
Packaging Quantity PL1	1
Packaging Quantity PL3	6
Packaging Quantity PL4	288

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com