


Uponor Wipex coupling PN10 63x8,6-G2

1018341

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

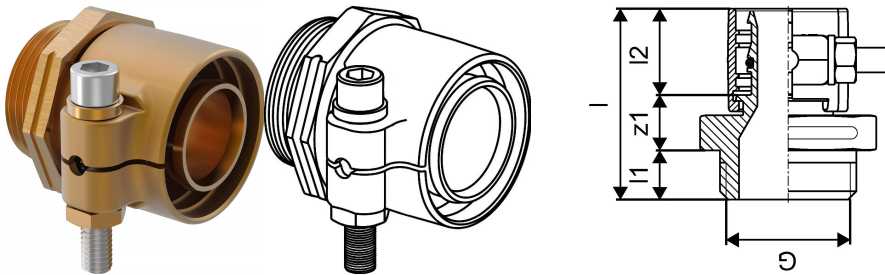

Application information Uponor Wipex coupling PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN10 63x8,6-G2

1018341

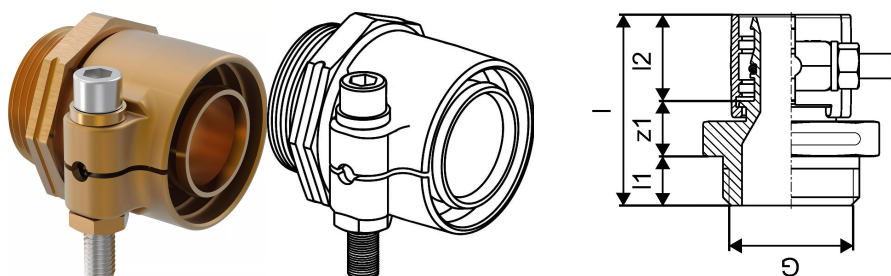

Measurements

Cylindric_thread_G	2
LENGTH_L	84
Length (l1)	20
Length (l2)	46
Wall thickness_s	8,6
z1	18

Product code

Item no EAN	7331541114165
Item no GF	35001018341
Item no GTIN	07331541114165
Item no LVI	1932163
Item no NOBB	41943440
Item no NRF	5110377
Item no RSK	2410676
Item no VVS	087883163

Dimensions

Item Unit Height	82
Item Unit Length	84
Item Unit Weight	1,123
Item Unit Width	98
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905259977
Packaging GTIN PL3	06414905260003
Packaging Height PL1	85
Packaging Height PL3	145
Packaging Length PL1	87

Packaging Length PL3	268
Packaging Quantity PL1	1
Packaging Quantity PL3	8
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,000746895
Packaging Volume PL3	0,009715
Packaging Weight PL1	1,133
Packaging Weight PL3	9,164
Packaging Width PL1	101
Packaging Width PL3	250

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com