


Uponor Wipex coupling PN10 90x12,3-G3

1018343

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

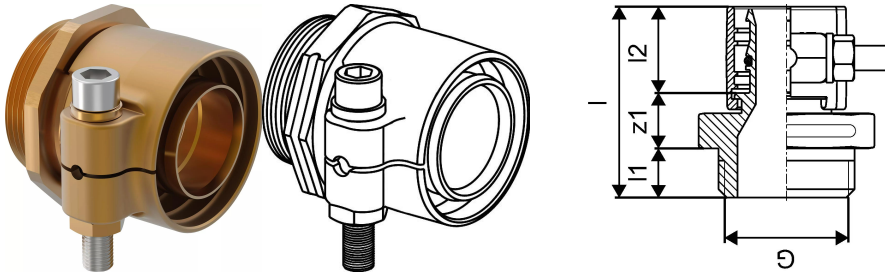

Application information Uponor Wipex coupling PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN10 90x12,3-G3

1018343

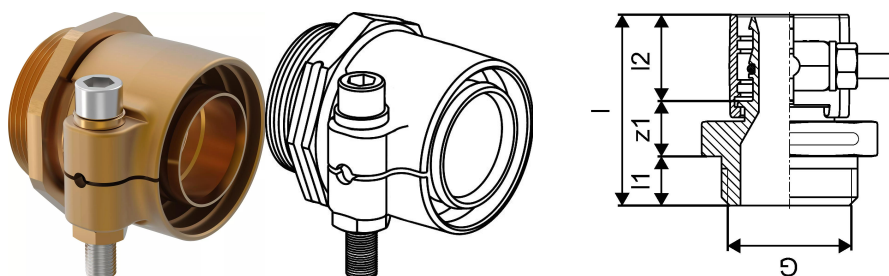

Measurements

Cylindric_thread_G	3
LENGTH_L	105
Length (l1)	24
Length (l2)	59
Wall thickness_s	12,3
z1	22

Product code

Item no EAN	7331541100168
Item no GF	35001018343
Item no GTIN	07331541100168
Item no LVI	1932182
Item no NRF	8360677
Item no RSK	2410678
Item no VVS	087883190

Dimensions

Item Unit Height	110
Item Unit Length	130
Item Unit Weight	2,503
Item Unit Width	110
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905480760
Packaging GTIN PL3	06414905480777
Packaging Height PL1	112
Packaging Height PL3	145
Packaging Length PL1	132
Packaging Length PL3	268

Packaging Quantity PL1	1
Packaging Quantity PL3	4
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,001655808
Packaging Volume PL3	0,009715
Packaging Weight PL1	2,514
Packaging Weight PL3	10,192
Packaging Width PL1	112
Packaging Width PL3	250

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com