


Uponor Radi Pipe natural PN6 20x2,0 120m

1022518

- Operating pressure 6 bar
- Coil

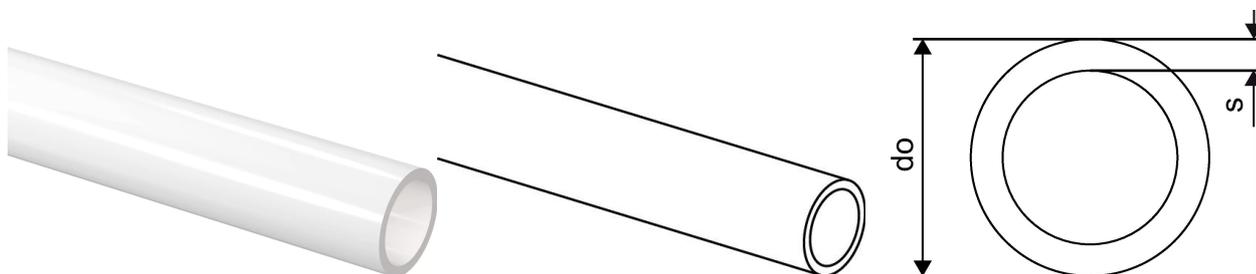

Application information Uponor Radi Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 20x2,0 120m

1022518

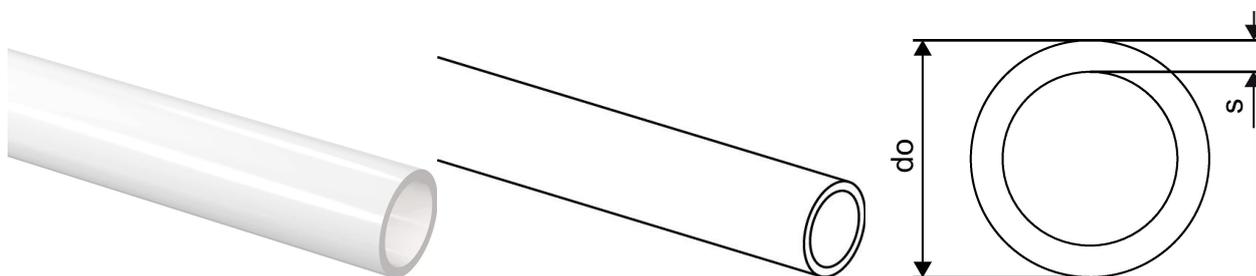

Product code

Item no EAN	7321500033125
Item no GF	35001022518
Item no GTIN	07321500033125
Item no LVI	2012121
Item no RSK	2418029
Item no VVS	087230120

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,129
Item Unit Width	20
Item_UOM	m

Measurements

Outer Diameter_do	20
Wall thickness_s	2

Packaging

Packaging GTIN PL3	06414905260669
Packaging GTIN PL4	06414905260676
Packaging Height PL3	160
Packaging Height PL4	950
Packaging Length PL3	790
Packaging Length PL4	1200
Packaging Quantity PL3	120
Packaging Quantity PL4	840
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,099856

Packaging Volume PL4	0,912
Packaging Weight PL3	15,635
Packaging Weight PL4	142,76
Packaging Width PL3	790
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com