


## Uponor Radi Pipe natural PN6 25x2,3 50m

1022689

- Operating pressure 6 bar
- Coil

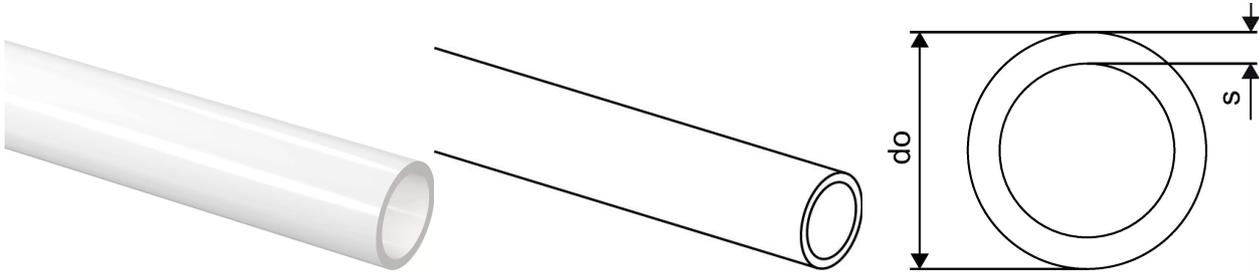

### Application information Uponor Radi Pipe natural PN6

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 25x2,3 50m

1022689

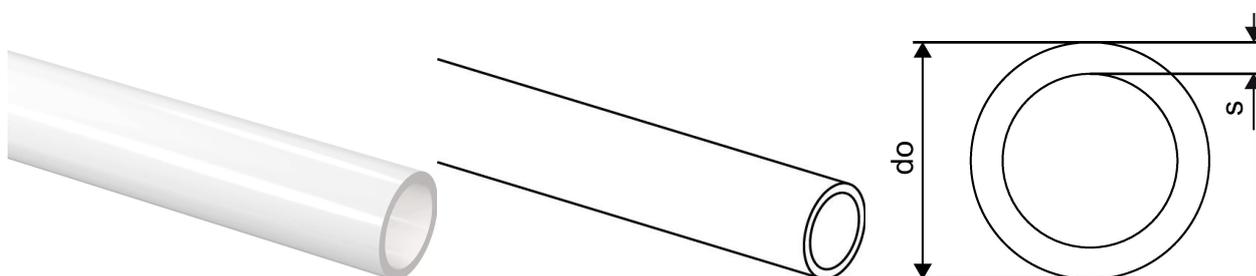

### Product code

Item no EAN	7321500033200
Item no GF	35001022689
Item no GTIN	07321500033200
Item no LVI	2012125
Item no NOBB	48326112
Item no NRF	8362303
Item no RSK	2418021

### Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,186
Item Unit Width	20
Item_UOM	m

### Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

### Packaging

Packaging GTIN PL1	06414905260706
Packaging GTIN PL4	06414905260713
Packaging Height PL1	120
Packaging Height PL4	800
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	450
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,07488
Packaging Volume PL4	0,768
Packaging Weight PL1	9,77
Packaging Weight PL4	111,93
Packaging Width PL1	780
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)