


Uponor Aqua Pipe natural PN10 S 63x8,6 6m

1023122

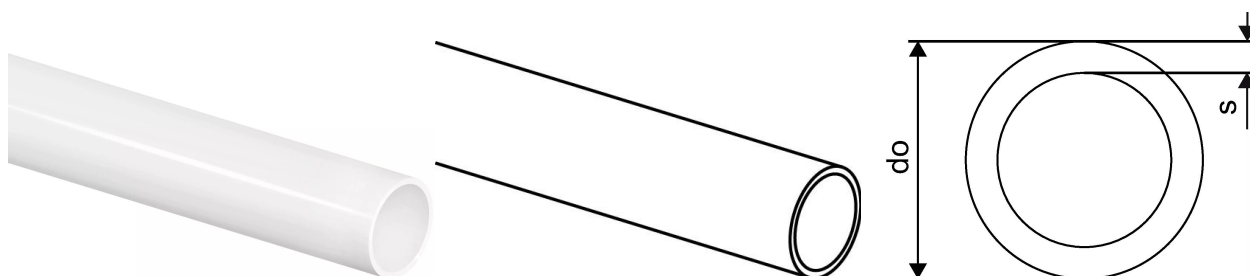

Application information Uponor Aqua Pipe natural PN10 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Cond

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN10 S 63x8,6 6m

1023122

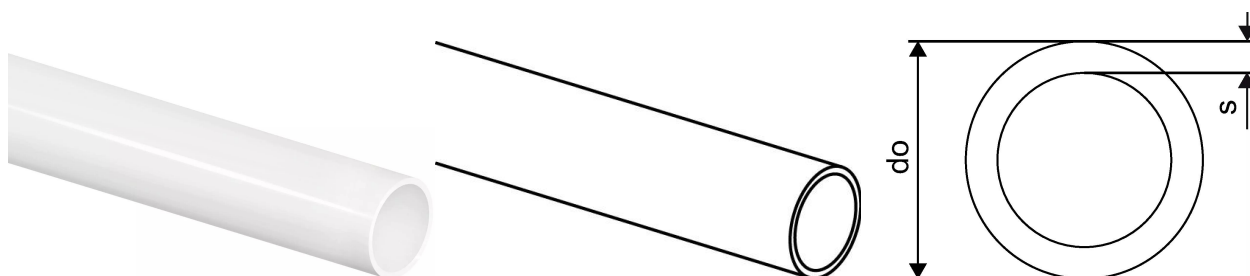

Technical data

Item Quantity 1	6
Item Quantity 2	420
Item (unit of measurement)	m
Outside diameter	63 mm
Length in meter	6 m
colour	natural -
pressure	10 bar
Outer diameter do	63 mm
Measure Strength Wall Thickness 3	8,6 mm

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com