


Uponor Wipex coupling PN10 110x15,1-G3

1023170

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

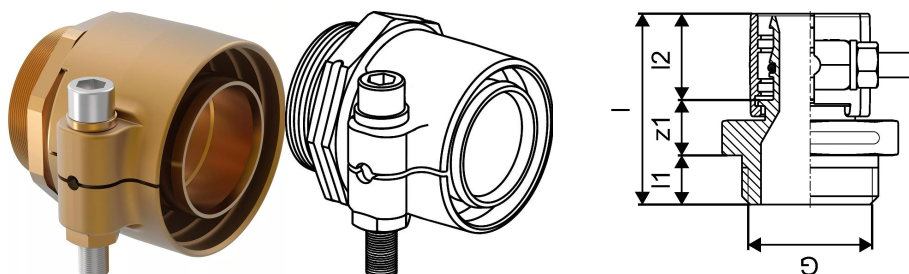

Application information Uponor Wipex coupling PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN10 110x15,1-G3

1023170

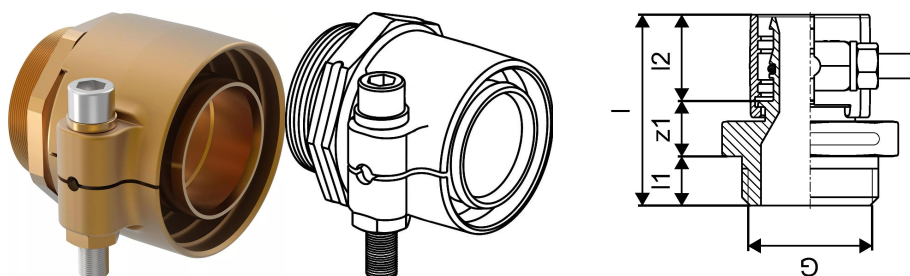

Measurements

Cylindric_thread_G	3
LENGTH_L	118
Length (l1)	24
Length (l2)	72
Wall thickness_s	15,1
z1	22

Product code

Item no EAN	7331541100175
Item no GF	35001023170
Item no GTIN	07331541100175
Item no LVI	1932194
Item no NRF	8360678
Item no RSK	2410679
Item no VVS	087883191

Dimensions

Item Unit Height	127
Item Unit Length	118
Item Unit Weight	3,177
Item Unit Width	150
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905261932
Packaging GTIN PL3	06414905261949
Packaging Height PL1	130
Packaging Height PL3	155
Packaging Length PL1	120
Packaging Length PL3	272

Packaging Quantity PL1	1
Packaging Quantity PL3	3
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,0023868
Packaging Volume PL3	0,01054
Packaging Weight PL1	3,192
Packaging Weight PL3	9,76
Packaging Width PL1	153
Packaging Width PL3	250

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com