


## Uponor RS adapter S-Press 75-RS2

**1029126**

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

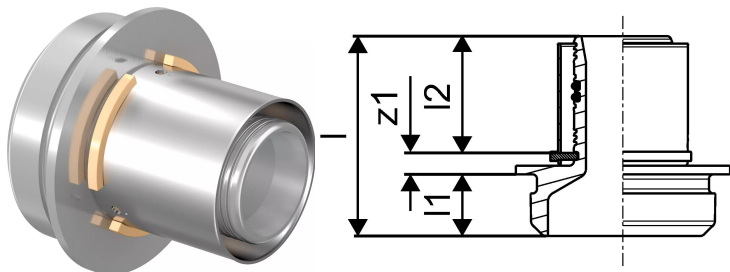

### Application information Uponor RS adapter S-Press

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter S-Press 75-RS2

1029126



### Product code

Item no EAN	4021598106635
Item no GF	35001029126
Item no GTIN	04021598106635
Item no LVI	1720823
Item no NRF	5071234
Item no RSK	1899488
Item no VVS	045450075

### Dimensions

Item Unit Height	89
Item Unit Length	79
Item Unit Weight	0,767
Item Unit Width	79
Item_UOM	pce

### Measurements

LENGTH_L	87,8
Length (l1)	20
Length (l2)	60,7
z1	7,1

### Packaging

Packaging GTIN PL1	06414905439362
Packaging GTIN PL4	06414905491278
Packaging Height PL1	102
Packaging Height PL4	700
Packaging Length PL1	202
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	400

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00247248
Packaging Volume PL4	0,672
Packaging Weight PL1	0,83
Packaging Weight PL4	332
Packaging Width PL1	120
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com