


Uponor RS adapter S-Press 75-RS2

1029126

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

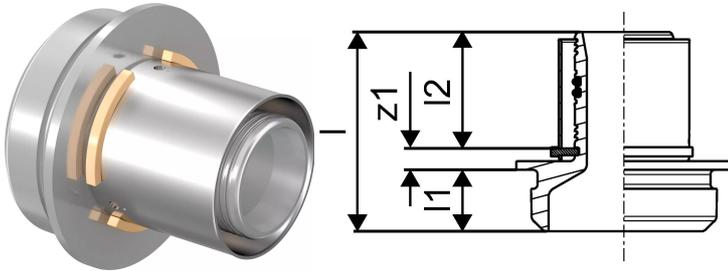

Application information Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press 75-RS2

1029126

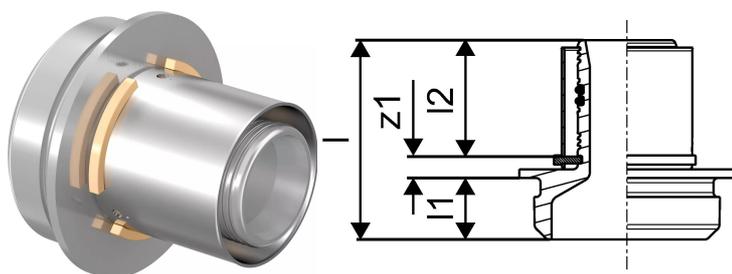

Product code

Item no EAN	4021598106635
Item no GF	35001029126
Item no GTIN	04021598106635
Item no LVI	1720823
Item no NRF	5071234
Item no RSK	1899488
Item no VVS	045450075

Dimensions

Item Unit Height	89
Item Unit Length	79
Item Unit Weight	0,767
Item Unit Width	79
Item_UOM	pce

Measurements

LENGTH_L	87,8
Length (l1)	20
Length (l2)	60,7
z1	7,1

Packaging

Packaging GTIN PL1	06414905439362
Packaging GTIN PL4	06414905491278
Packaging Height PL1	102
Packaging Height PL4	700
Packaging Length PL1	202
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	400

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00247248
Packaging Volume PL4	0,672
Packaging Weight PL1	0,83
Packaging Weight PL4	332
Packaging Width PL1	120
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com