


## Uponor RS adapter S-Press 110-RS3

**1029128**

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

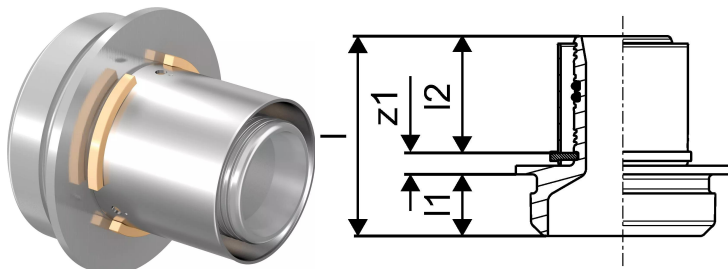

### Application information Uponor RS adapter S-Press

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

Uponor RS adapter S-Press 110-RS3  
1029128

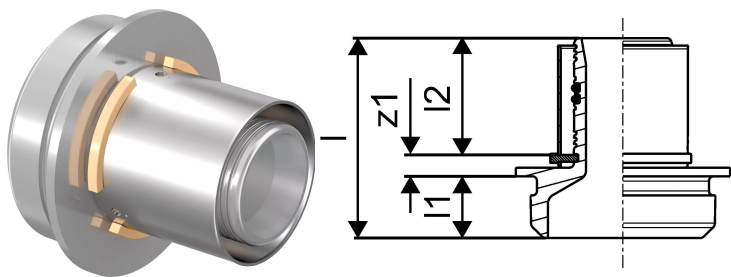

Technical data

Item (unit of measurement)	pce
Item no VVS	045450110
Item no LVI	1720825
Item no NRF	5071236
Length (l)	93 mm
Length (l1)	20 mm
Length (l2)	62 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	240

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com