


## Uponor RS flange adapter PN16 RS3-DN80

**1029129**

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

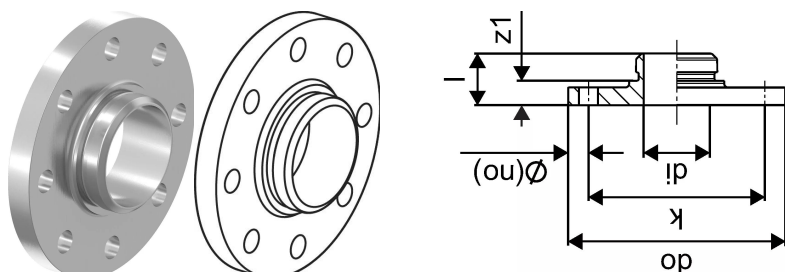

### Application information Uponor RS flange adapter PN6

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS flange adapter PN16 RS3-DN80

1029129

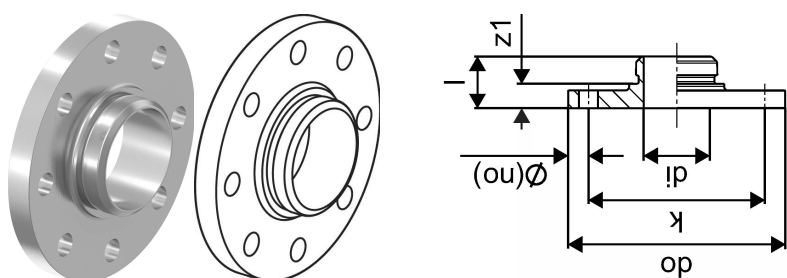

### Measurements

Inner_diameter_di	78,1
LENGTH_L	45
Outer Diameter_do	200
Z Measurement k	160
z1	25

### Product code

Item no EAN	4021598106666
Item no GF	35001029129
Item no GTIN	04021598106666
Item no LVI	1720833
Item no NRF	5071245
Item no RSK	1899498
Item no VVS	045458080

### Dimensions

Item Unit Height	46
Item Unit Length	200
Item Unit Weight	4,452
Item Unit Width	200
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905481323
Packaging GTIN PL4	06414905481330
Packaging Height PL1	54
Packaging Height PL4	900
Packaging Length PL1	250
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0031725
Packaging Volume PL4	0,864
Packaging Weight PL1	4,62
Packaging Weight PL4	429,687
Packaging Width PL1	235
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com