


Uponor RS flange adapter RS3-DN80 (PN16)

1029129

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

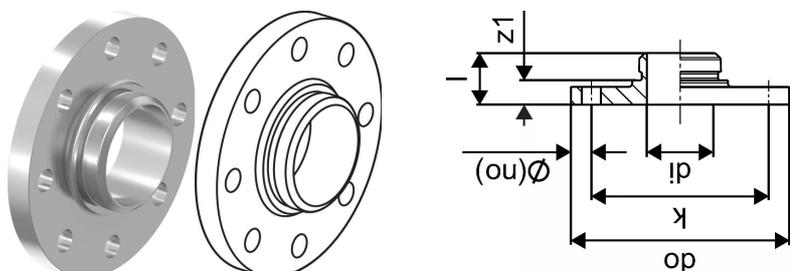

Application information Uponor RS flange adapter

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS flange adapter RS3-DN80 (PN16)

1029129

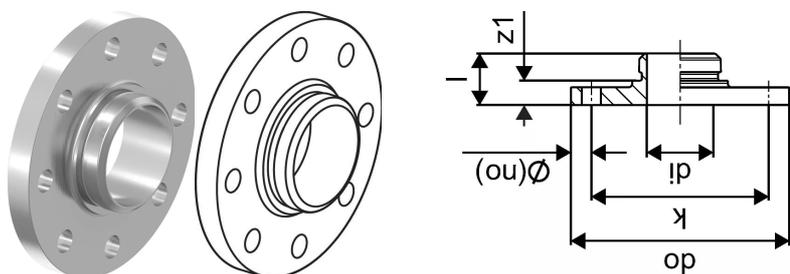

Measurements

Inner_diameter_di	78,1
LENGTH_L	45
Outer Diameter_do	200
Z Measurement k	160
z1	25

Product code

Item no EAN	4021598106666
Item no GF	35001029129
Item no GTIN	04021598106666
Item no LVI	1720833
Item no NRF	5071245
Item no RSK	1899498
Item no VVS	045458080

Dimensions

Item Unit Height	46
Item Unit Length	200
Item Unit Weight	4,452
Item Unit Width	200
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481323
Packaging GTIN PL4	06414905481330
Packaging Height PL1	54
Packaging Height PL4	900
Packaging Length PL1	250
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0031725
Packaging Volume PL4	0,864
Packaging Weight PL1	4,62
Packaging Weight PL4	429,687
Packaging Width PL1	235
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com