


## Uponor RS flange adapter RS3-DN100 (PN16)

### 1029130

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

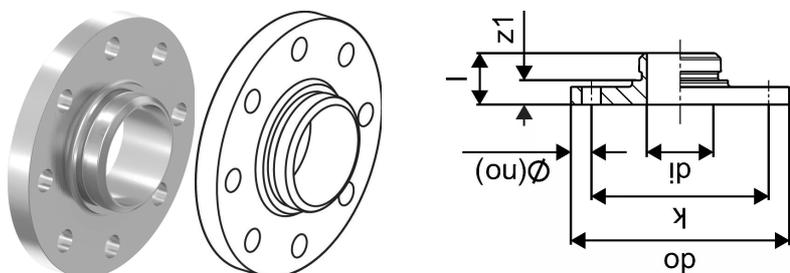

### Application information Uponor RS flange adapter

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS flange adapter RS3-DN100 (PN16)

1029130

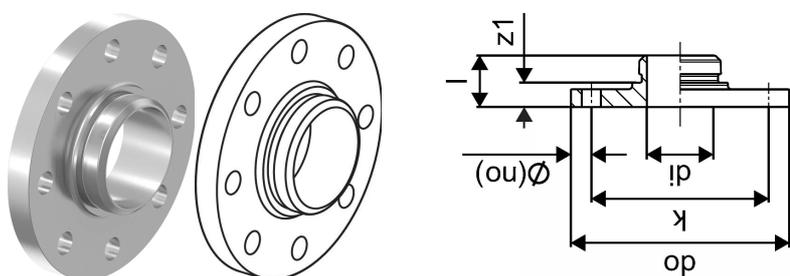

### Measurements

Inner_diameter_di	78,1
LENGTH_L	44
Outer Diameter_do	220
Z Measurement k	180
z1	24

### Product code

Item no EAN	4021598106673
Item no GF	35001029130
Item no GTIN	04021598106673
Item no LVI	1720834
Item no NRF	5071246
Item no RSK	1899499
Item no VVS	045458100

### Dimensions

Item Unit Height	50
Item Unit Length	220
Item Unit Weight	5,23
Item Unit Width	220
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905481446
Packaging GTIN PL4	06414905481453
Packaging Height PL1	60
Packaging Height PL4	488
Packaging Length PL1	350
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004935
Packaging Volume PL4	0,46848
Packaging Weight PL1	5,33
Packaging Weight PL4	479,7
Packaging Width PL1	235
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)