


Uponor RS flange adapter PN16 RS3-DN100

1029130

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

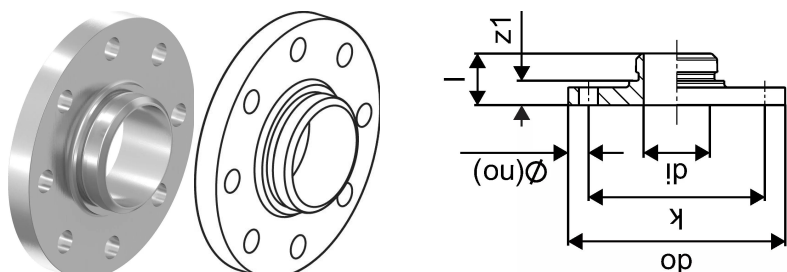

Application information Uponor RS flange adapter PN6

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS flange adapter PN16 RS3-DN100

1029130

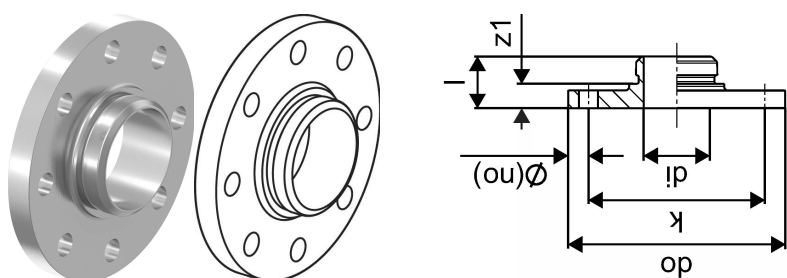

Measurements

Inner_diameter_di	78,1
LENGTH_L	44
Outer Diameter_do	220
Z Measurement k	180
z1	24

Product code

Item no EAN	4021598106673
Item no GF	35001029130
Item no GTIN	04021598106673
Item no LVI	1720834
Item no NRF	5071246
Item no RSK	1899499
Item no VVS	045458100

Dimensions

Item Unit Height	50
Item Unit Length	220
Item Unit Weight	5,23
Item Unit Width	220
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481446
Packaging GTIN PL4	06414905481453
Packaging Height PL1	60
Packaging Height PL4	488
Packaging Length PL1	350
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004935
Packaging Volume PL4	0,46848
Packaging Weight PL1	5,33
Packaging Weight PL4	479,7
Packaging Width PL1	235
Packaging Width PL4	800

Documents

[Page with all documents](#) 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com