


Uponor RS adapter male thread R2"MT-RS2

1029131

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

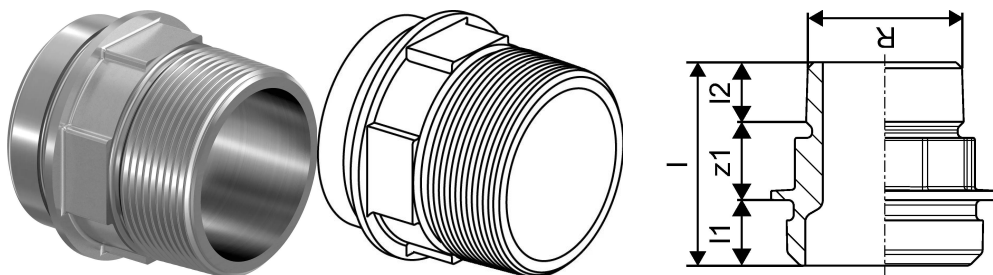

Application information Uponor RS adapter male thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter male thread R2"MT-RS2

1029131



Technical data

Item no VVS	045451112
Item no NRF	5071237
Item (unit of measurement)	Piece
Length (l)	66 mm
Length (l1)	20 mm
Length (l2)	23 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com