


Uponor RS adapter male thread R2 1/2"MT-RS2

1029132

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

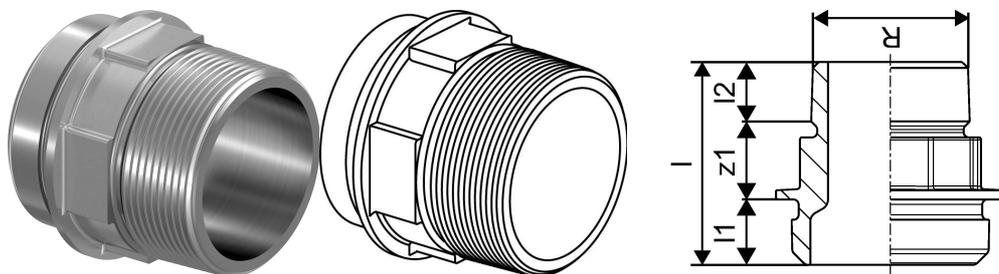

Application information Uponor RS adapter male thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter male thread R2 1/2"MT-RS2

1029132

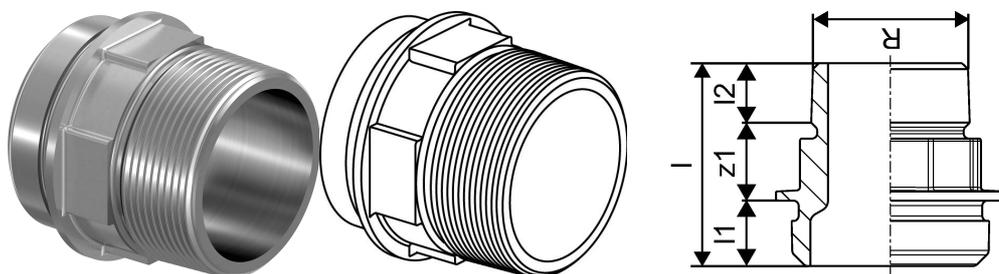

Product code

Item no EAN	4021598106697
Item no GF	35001029132
Item no GTIN	04021598106697
Item no LVI	1720827
Item no NRF	5071238
Item no RSK	1899492
Item no VVS	045451167

Dimensions

Item Unit Height	65
Item Unit Length	74
Item Unit Weight	0,55
Item Unit Width	74
Item_UOM	pce

Measurements

LENGTH_L	62,8
Length (l1)	20
Length (l2)	27,1
Male_thread_R	2 1/2
z1	15,7

Packaging

Packaging GTIN PL1	06414905439416
Packaging GTIN PL4	06414905491322
Packaging Height PL1	82
Packaging Height PL4	680
Packaging Length PL1	117
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0009594
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,607
Packaging Weight PL4	291,36
Packaging Width PL1	100
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com