


## Uponor RS adapter male thread R3"MT-RS3

1029133

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

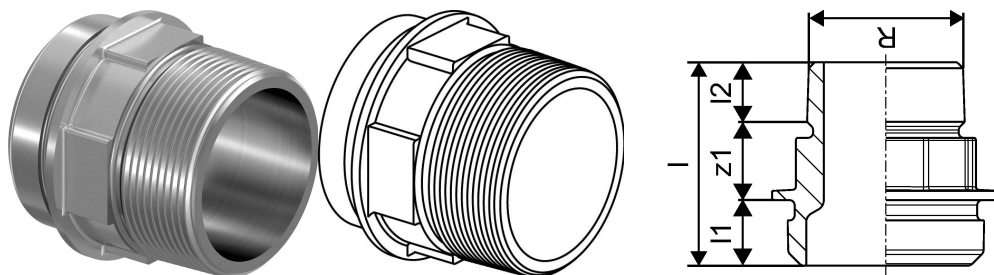

### Application information Uponor RS adapter male thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter male thread R3"MT-RS3

1029133

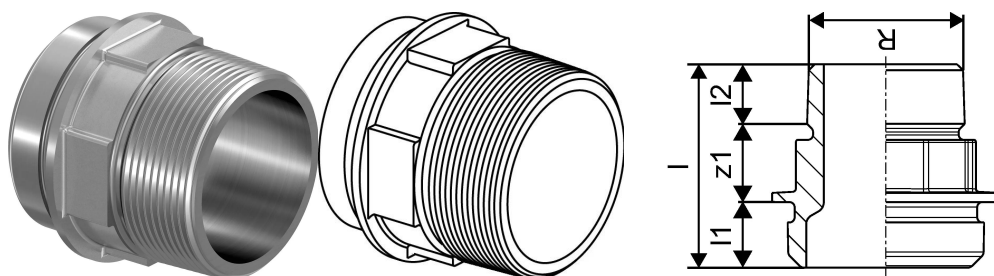

### Product code

Item no EAN	4021598106703
Item no GF	35001029133
Item no GTIN	04021598106703
Item no LVI	1720828
Item no NRF	5071239
Item no RSK	1899493
Item no VVS	045451114

### Dimensions

Item Unit Height	74
Item Unit Length	90
Item Unit Weight	0,826
Item Unit Width	90
Item_UOM	pce

### Measurements

LENGTH_L	72,6
Length (l1)	20
Length (l2)	29,8
Male_thread_R	3
z1	22,8

### Packaging

Packaging GTIN PL1	06414905523320
Packaging GTIN PL4	06414905523337
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	115
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00171925
Packaging Volume PL4	0,6864
Packaging Weight PL1	0,926
Packaging Weight PL4	222,12
Packaging Width PL1	130
Packaging Width PL4	800

## Documents

[Page with all documents](#) 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com