


Uponor RS adapter male thread R3"MT-RS3

1029133

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

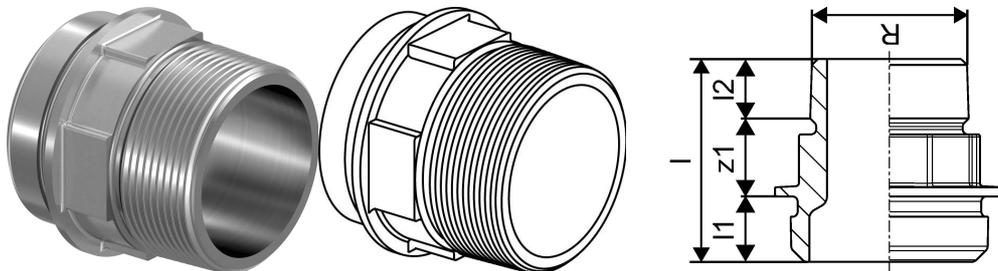

Application information Uponor RS adapter male thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter male thread R3"MT-RS3

1029133

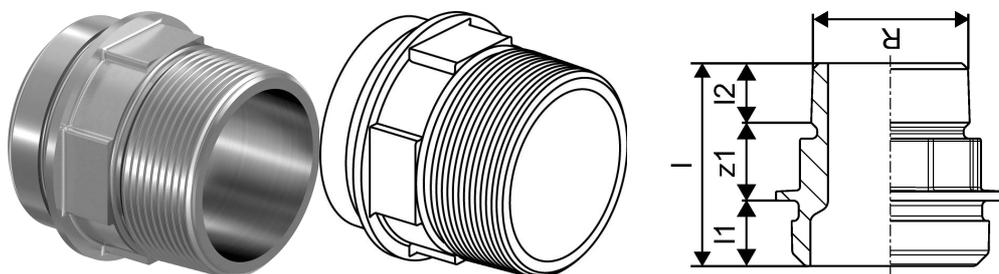

Product code

Item no EAN	4021598106703
Item no GF	35001029133
Item no GTIN	04021598106703
Item no LVI	1720828
Item no NRF	5071239
Item no RSK	1899493
Item no VVS	045451114

Dimensions

Item Unit Height	74
Item Unit Length	90
Item Unit Weight	0,826
Item Unit Width	90
Item_UOM	pce

Measurements

LENGTH_L	72,6
Length (l1)	20
Length (l2)	29,8
Male_thread_R	3
z1	22,8

Packaging

Packaging GTIN PL1	06414905523320
Packaging GTIN PL4	06414905523337
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	115
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00171925
Packaging Volume PL4	0,6864
Packaging Weight PL1	0,926
Packaging Weight PL4	222,12
Packaging Width PL1	130
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com