


Uponor RS adapter male thread R3"MT-RS3

1029133

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

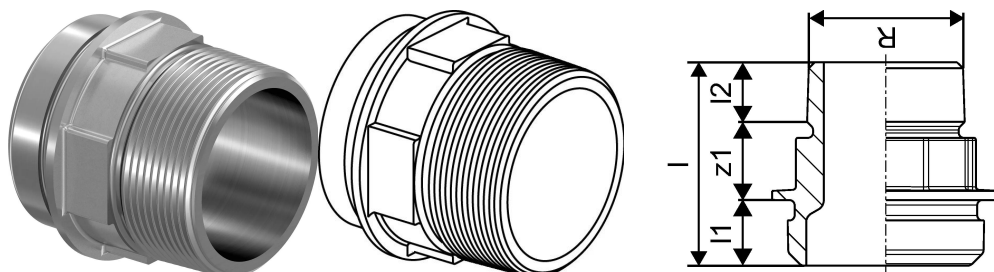

Application information Uponor RS adapter male thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter male thread R3"MT-RS3

1029133

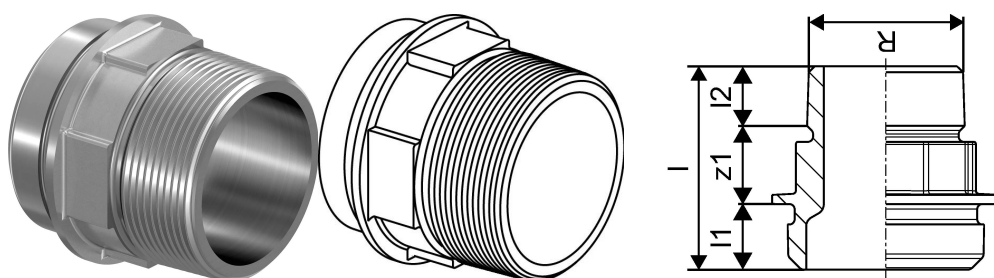

Technical data

Item (unit of measurement) pce

Item no VVS 045451114

Item no LVI 1720828

Item no NRF 5071239

Length (l) 73 mm

Length (l1) 20 mm

Length (l2) 30 mm

Packaging Quantity PL1 1

Packaging Quantity PL4 240

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com