


## Uponor RS adapter female thread Rp1"FT-RS2

1029134

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

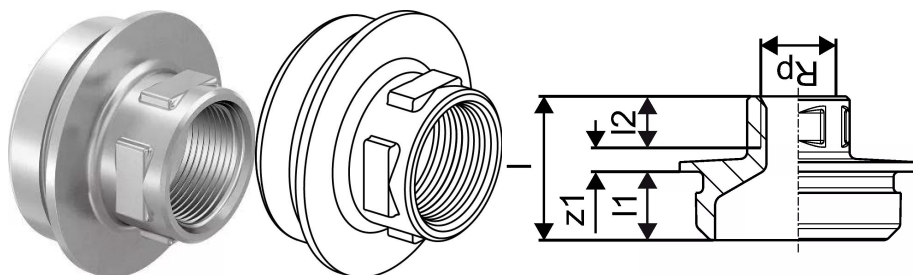

### Application information Uponor RS adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter female thread Rp1"FT-RS2

1029134



### Measurements

Female thread Rp	1
LENGTH_L	44,9
Length (l1)	20
Length (l2)	19,1
z1	5,8

### Product code

Item no EAN	4021598106710
Item no GF	35001029134
Item no GTIN	04021598106710
Item no LVI	1720829
Item no NRF	5071241
Item no RSK	1899494
Item no VVS	045452165

### Dimensions

Item Unit Height	45
Item Unit Length	64
Item Unit Weight	0,316
Item Unit Width	64
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905523306
Packaging GTIN PL4	06414905523313
Packaging Height PL1	80
Packaging Height PL4	680
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00096
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,371
Packaging Weight PL4	178,1
Packaging Width PL1	100
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com