


## Uponor RS adapter female thread Rp2"FT-RS2

1029135

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

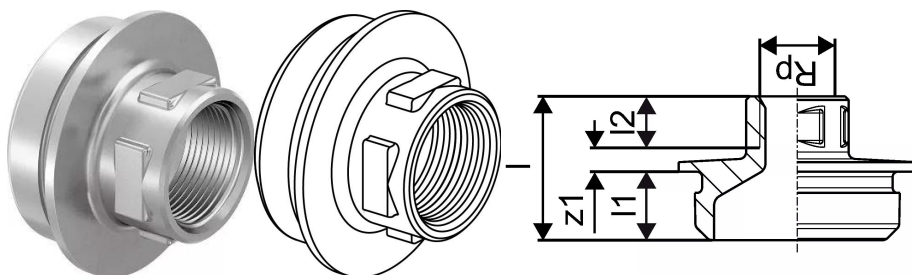

### Application information Uponor RS adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.


#### Certification

- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor RS adapter female thread Rp2"FT-RS2  
1029135

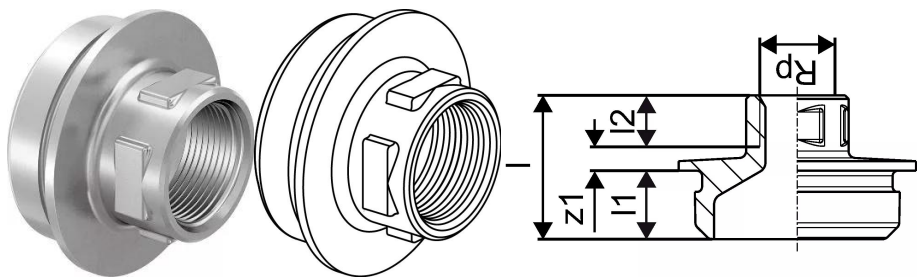

Technical data

Item (unit of measurement)	pce
Item no VVS	045452112
Item no LVI	1720830
Item no NRF	5071242
Female thread Rp	2 inch
Length (l)	54 mm
Length (l1)	20 mm
Length (l2)	26 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com