


Uponor RS adapter female thread Rp2"FT-RS2

1029135

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

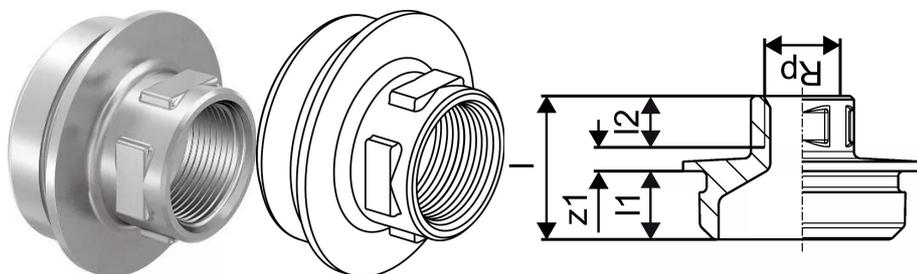

Application information Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter female thread Rp2"FT-RS2

1029135

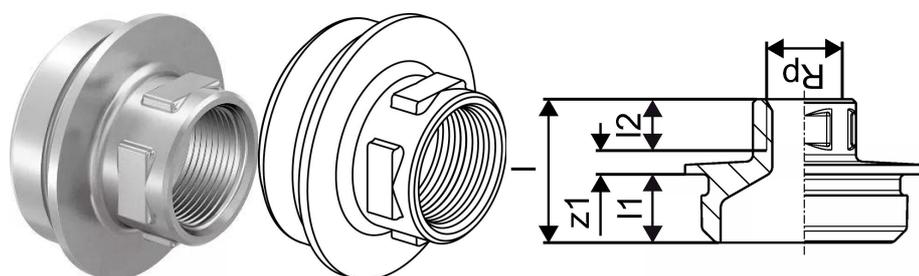

Measurements

Female thread Rp	2
LENGTH_L	54
Length (l1)	20
Length (l2)	25,7
z1	8,3

Product code

Item no EAN	4021598106727
Item no GF	35001029135
Item no GTIN	04021598106727
Item no LVI	1720830
Item no NRF	5071242
Item no RSK	1899495
Item no VVS	045452112

Dimensions

Item Unit Height	57
Item Unit Length	67
Item Unit Weight	0,473
Item Unit Width	67
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905263837
Packaging GTIN PL4	06414905263844
Packaging Height PL1	80
Packaging Height PL4	680
Packaging Length PL1	115
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0009016
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,528
Packaging Weight PL4	253,25
Packaging Width PL1	98
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com