


Uponor RS adapter female thread Rp2 1/2"FT-RS2

1029136

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

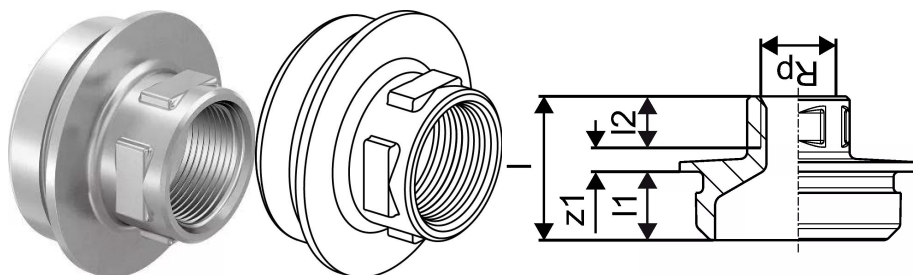

Application information Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter female thread Rp2 1/2"FT-RS2

1029136

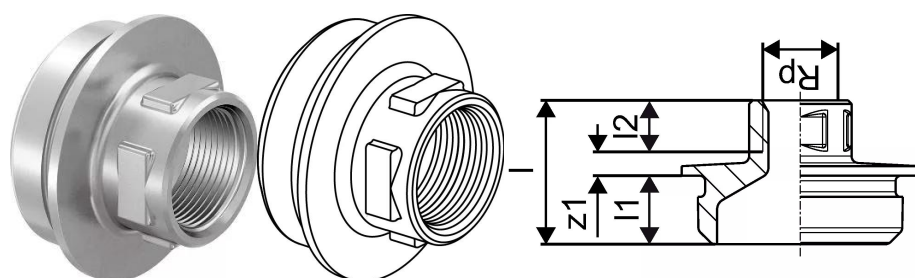

Measurements

Female thread Rp	2,5
LENGTH_L	62,5
Length (l1)	20
Length (l2)	30,2
z1	12,3

Product code

Item no EAN	4021598106734
Item no GF	35001029136
Item no GTIN	04021598106734
Item no LVI	1720831
Item no NRF	5071243
Item no RSK	1899496
Item no VVS	045452167

Dimensions

Item Unit Height	74
Item Unit Length	80
Item Unit Weight	0,569
Item Unit Width	80
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905439430
Packaging GTIN PL4	06414905491346
Packaging Height PL1	82
Packaging Height PL4	680
Packaging Length PL1	100
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000984
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,624
Packaging Weight PL4	299,67
Packaging Width PL1	120
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com