


Uponor RS adapter female thread Rp3"FT-RS3

1029137

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

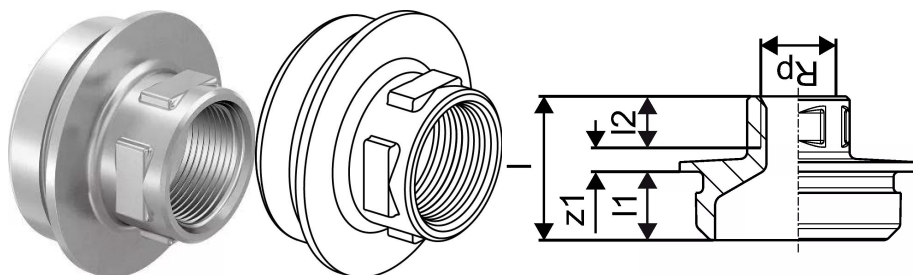

Application information Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter female thread Rp3"FT-RS3

1029137

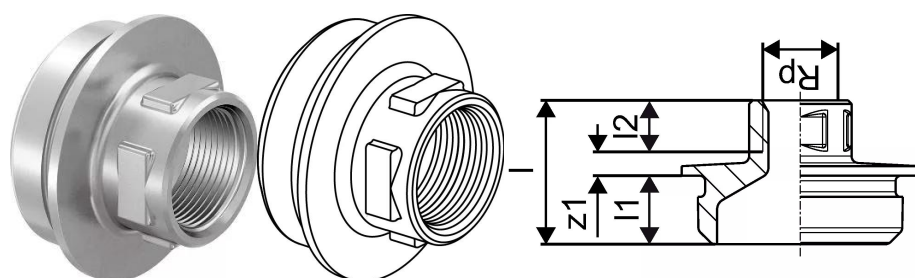

Measurements

Female thread Rp	3
LENGTH_L	65,3
Length (l1)	20
Length (l2)	33,3
z1	12

Product code

Item no EAN	4021598106741
Item no GF	35001029137
Item no GTIN	04021598106741
Item no LVI	1720832
Item no NRF	5071244
Item no RSK	1899497
Item no VVS	045452114

Dimensions

Item Unit Height	93
Item Unit Length	65
Item Unit Weight	0,751
Item Unit Width	93
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905523375
Packaging GTIN PL4	06414905523382
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	134
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0023115
Packaging Volume PL4	0,6864
Packaging Weight PL1	0,867
Packaging Weight PL4	209
Packaging Width PL1	150
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com