


Uponor RS elbow RS2-RS2

1029138

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

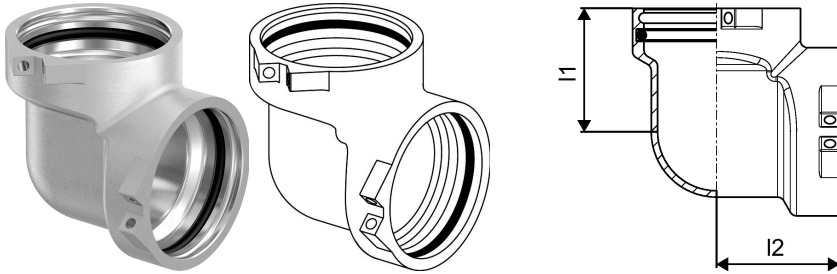

Application information Uponor RS elbow

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS elbow RS2-RS2

1029138

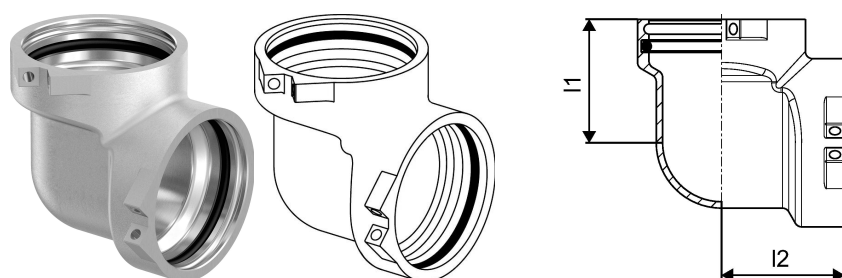

Product code

Item no EAN	4021598106758
Item no GF	35001029138
Item no GTIN	04021598106758
Item no LVI	1720811
Item no NRF	5071221
Item no RSK	1896578
Item no VVS	045453112

Dimensions

Item Unit Height	69
Item Unit Length	84
Item Unit Weight	0,538
Item Unit Width	84
Item_UOM	pce

Measurements

Length (I1)	51
Length (I2)	51

Packaging

Packaging GTIN PL1	06414905439454
Packaging GTIN PL4	06414905491360
Packaging Height PL1	81
Packaging Height PL4	680
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	336
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00139725
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,602
Packaging Weight PL4	202,28
Packaging Width PL1	115
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com