


Uponor RS elbow RS2-RS2

1029138

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

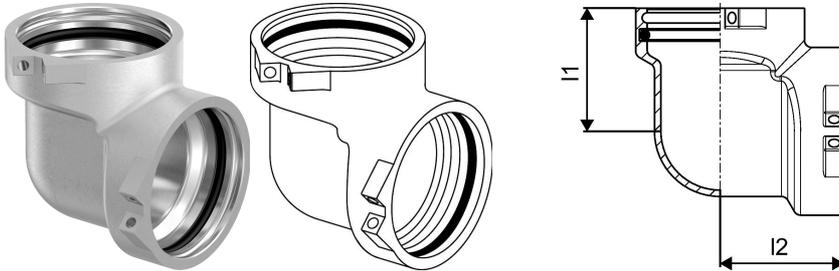

Application information Uponor RS elbow

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS elbow RS2-RS2

1029138

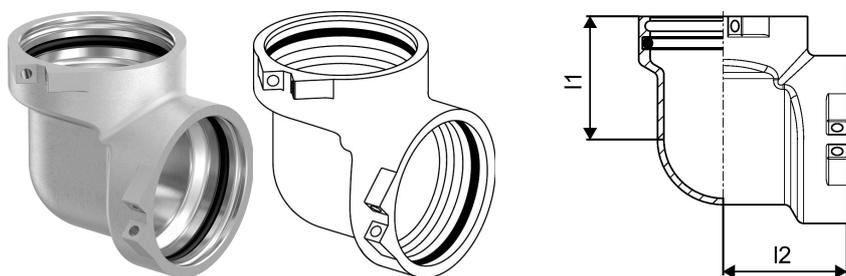

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598106758 |
| Item no GF | 35001029138 |
| Item no GTIN | 04021598106758 |
| Item no LVI | 1720811 |
| Item no NRF | 5071221 |
| Item no RSK | 1896578 |
| Item no VVS | 045453112 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 69 |
| Item Unit Length | 84 |
| Item Unit Weight | 0,538 |
| Item Unit Width | 84 |
| Item_UOM | pce |

Measurements

| | |
|-------------|----|
| Length (I1) | 51 |
| Length (I2) | 51 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905439454 |
| Packaging GTIN PL4 | 06414905491360 |
| Packaging Height PL1 | 81 |
| Packaging Height PL4 | 680 |
| Packaging Length PL1 | 150 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL4 | 336 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |

| | |
|----------------------|------------|
| Packaging Volume PL1 | 0,00139725 |
| Packaging Volume PL4 | 0,6528 |
| Packaging Weight PL1 | 0,602 |
| Packaging Weight PL4 | 202,28 |
| Packaging Width PL1 | 115 |
| Packaging Width PL4 | 800 |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com