


Uponor RS elbow RS3-RS3

1029139

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

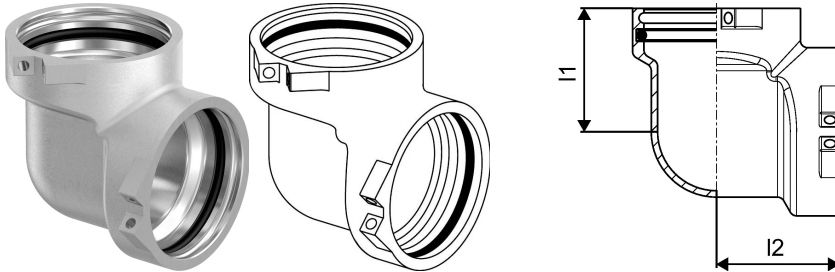

Application information Uponor RS elbow

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS elbow RS3-RS3

1029139

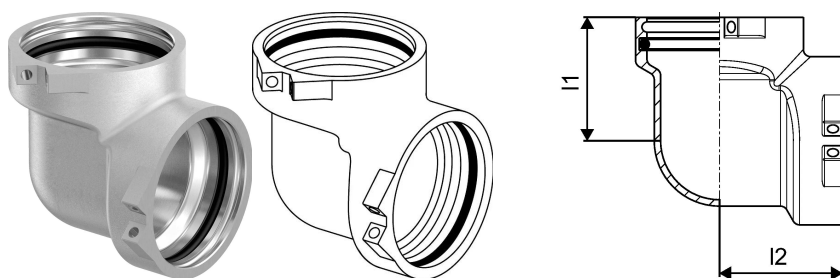

Product code

Item no EAN	4021598106765
Item no GF	35001029139
Item no GTIN	04021598106765
Item no LVI	1720812
Item no NRF	5071222
Item no RSK	1896579
Item no VVS	045453114

Dimensions

Item Unit Height	100
Item Unit Length	118
Item Unit Weight	1,54
Item Unit Width	105
Item_UOM	pce

Measurements

Length (I1)	68
Length (I2)	68

Packaging

Packaging GTIN PL1	06414905439461
Packaging GTIN PL4	06414905491377
Packaging Height PL1	110
Packaging Height PL4	715
Packaging Length PL1	145
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,0020735
Packaging Volume PL4	0,6864
Packaging Weight PL1	1,64
Packaging Weight PL4	393,6
Packaging Width PL1	130
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com