


## Uponor RS elbow RS3-RS3

1029139

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

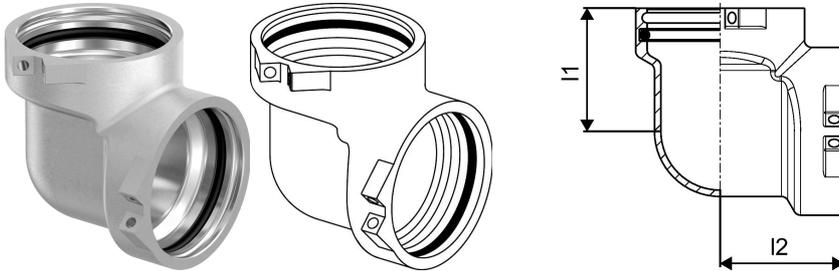

### Application information Uponor RS elbow

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS elbow RS3-RS3

1029139

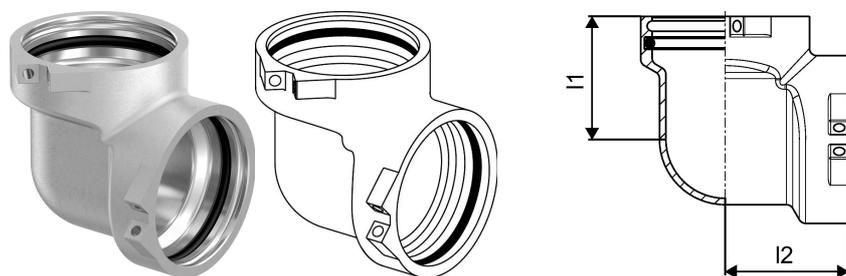

### Product code

Item no EAN	4021598106765
Item no GF	35001029139
Item no GTIN	04021598106765
Item no LVI	1720812
Item no NRF	5071222
Item no RSK	1896579
Item no VVS	045453114

### Dimensions

Item Unit Height	100
Item Unit Length	118
Item Unit Weight	1,54
Item Unit Width	105
Item_UOM	pce

### Measurements

Length (I1)	68
Length (I2)	68

### Packaging

Packaging GTIN PL1	06414905439461
Packaging GTIN PL4	06414905491377
Packaging Height PL1	110
Packaging Height PL4	715
Packaging Length PL1	145
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,0020735
Packaging Volume PL4	0,6864
Packaging Weight PL1	1,64
Packaging Weight PL4	393,6
Packaging Width PL1	130
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)