
Product data sheet




GF Uponor RS elbow 45° RS2-RS2

1029140

- Made of tin-plated DR brass (lead-free)
- Base part for all RS2 or RS3 inserts including 2 lock pins.

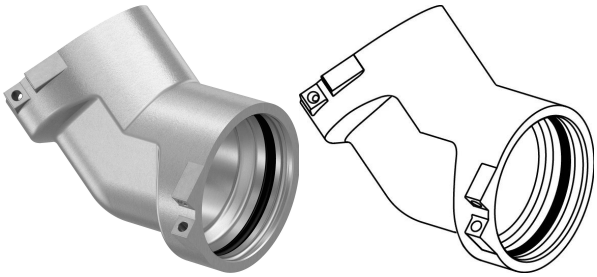



Application information GF Uponor RS elbow 45°

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor RS elbow 45° RS2-RS2

1029140

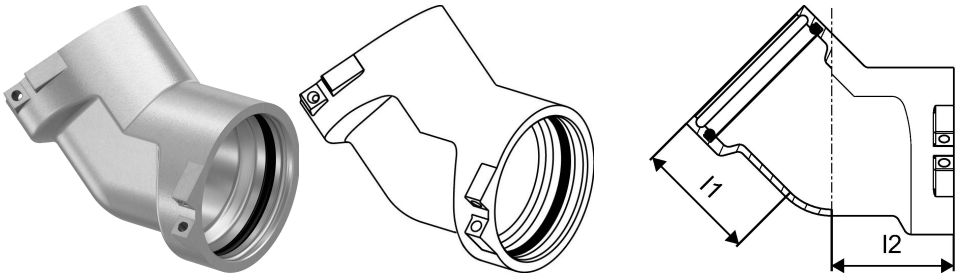

Product code

Item no EAN	4021598106772
Item no GF	35001029140
Item no GTIN	04021598106772
Item no LVI	1720813
Item no NRF	5071223
Item no RSK	1896580
Item no VVS	045454112

Dimensions

Item Unit Height	75
Item Unit Length	116
Item Unit Weight	0,682
Item Unit Width	90
Item_UOM	pce

Measurements

Length (l1)	51
Length (l2)	51

Packaging

Packaging GTIN PL1	06414905439478
Packaging GTIN PL4	06414905491384
Packaging Height PL1	90
Packaging Height PL4	680
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	336

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0015525
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,742
Packaging Weight PL4	250
Packaging Width PL1	115
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+