


## Uponor RS elbow 45° RS3-RS3

1029141

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

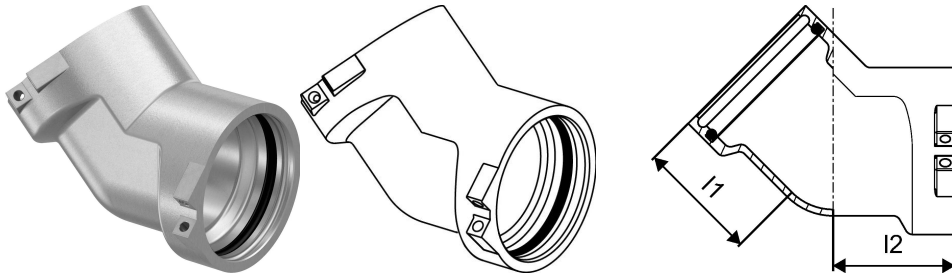

### Application information Uponor RS elbow 45°

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Leak path test

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- WRAS
- DVGW
- KIWA

## Uponor RS elbow 45° RS3-RS3

1029141

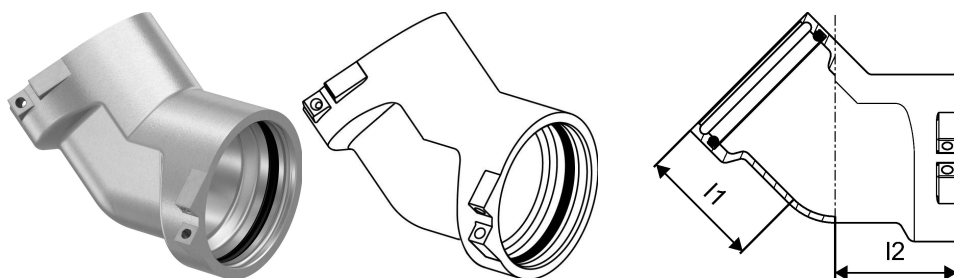

### Technical data

Item Quantity 1	1
Item Quantity 2	175
Item (unit of measurement)	pce
Length (l1)	68 mm
Length (l2)	68 mm

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E [info@uponor.com](mailto:info@uponor.com)  
F +358 (0)20 129 2841

[www.uponor.com](http://www.uponor.com)