


## Uponor RS elbow 45° RS3-RS3

1029141

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

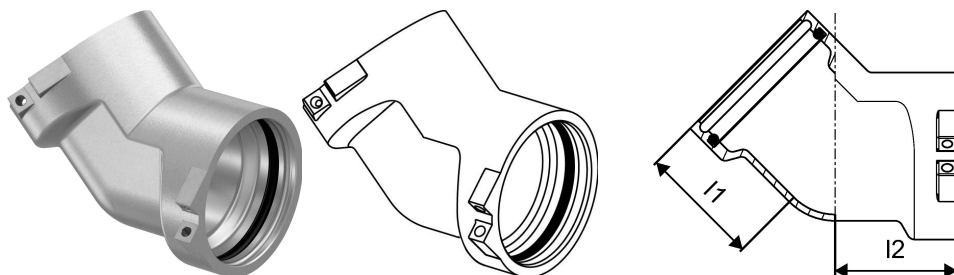

### Application information Uponor RS elbow 45°

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS elbow 45° RS3-RS3

1029141

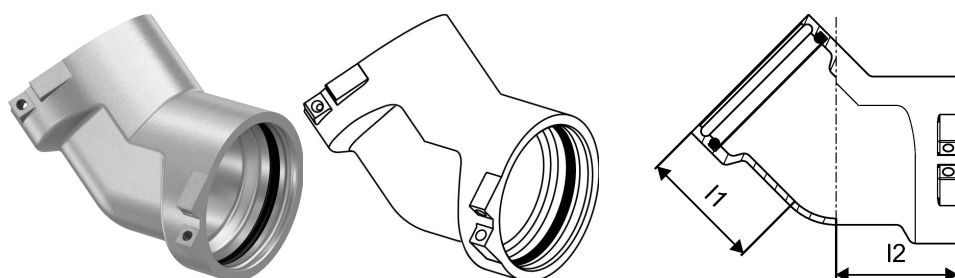

### Product code

Item no EAN	4021598106789
Item no GF	35001029141
Item no GTIN	04021598106789
Item no LVI	1720814
Item no NRF	5071224
Item no RSK	1896581
Item no VVS	045454114

### Dimensions

Item Unit Height	100
Item Unit Length	150
Item Unit Weight	1,93
Item Unit Width	100
Item_UOM	pce

### Measurements

Length (I1)	68
Length (I2)	68

### Packaging

Packaging GTIN PL1	06414905439485
Packaging GTIN PL4	06414905491391
Packaging Height PL1	110
Packaging Height PL4	750
Packaging Length PL1	163
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	175
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,0028688
Packaging Volume PL4	0,72
Packaging Weight PL1	2,042
Packaging Weight PL4	357,35
Packaging Width PL1	160
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)