


Uponor RS tee RS2-RS2-RS2

1029142

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 3 lock pins.

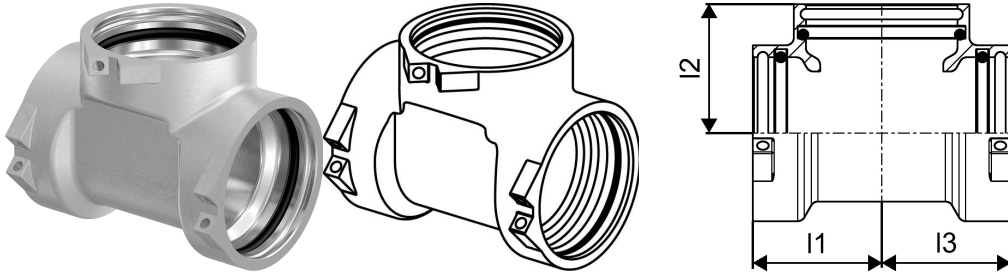

Application information Uponor RS tee

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS tee RS2-RS2-RS2

1029142

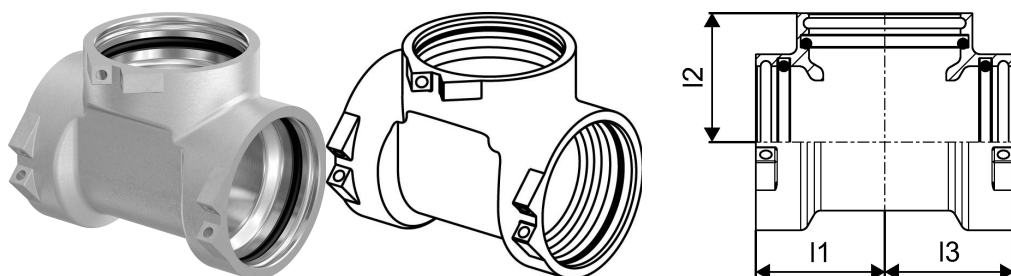

Product code

Item no EAN	4021598106796
Item no GF	35001029142
Item no GTIN	04021598106796
Item no LVI	1720815
Item no NRF	5071225
Item no RSK	1808049
Item no VVS	045455112

Dimensions

Item Unit Height	74
Item Unit Length	101
Item Unit Weight	0,78
Item Unit Width	88
Item_UOM	pce

Measurements

Length (l1)	51
Length (l2)	51
Length (l3)	51

Packaging

Packaging GTIN PL1	06414905439492
Packaging GTIN PL4	06414905491407
Packaging Height PL1	80
Packaging Height PL4	680
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	336
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,001332
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,84
Packaging Weight PL4	282,24
Packaging Width PL1	111
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com