



Uponor RS tee RS3-RS3-RS3

1029143

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 3 lock pins.

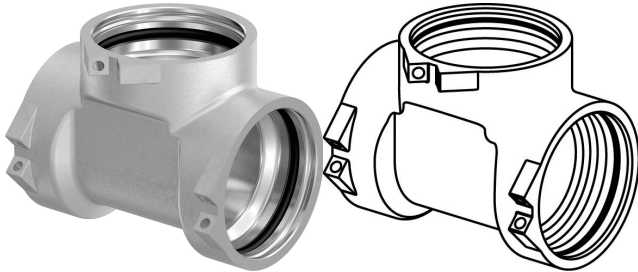

Application information Uponor RS tee

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS tee RS3-RS3-RS3

1029143

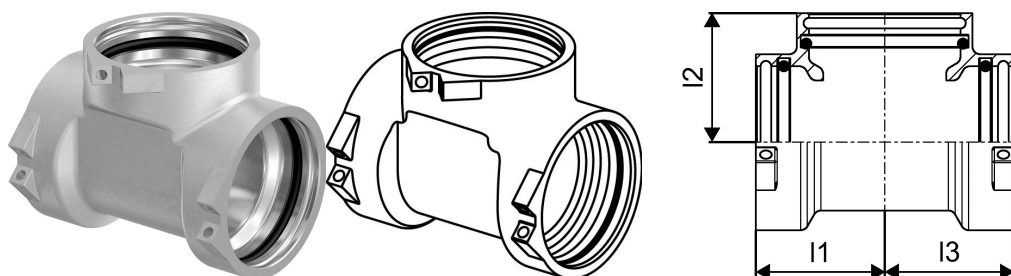

Product code

Item no EAN	4021598106802
Item no GF	35001029143
Item no GTIN	04021598106802
Item no LVI	1720816
Item no NRF	5071226
Item no RSK	1808050
Item no VVS	045455114

Dimensions

Item Unit Height	108
Item Unit Length	140
Item Unit Weight	1,0
Item Unit Width	123
Item_UOM	pce

Measurements

Length (l1)	68
Length (l2)	68
Length (l3)	68

Packaging

Packaging GTIN PL1	06414905439508
Packaging GTIN PL4	06414905491414
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	160
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	175
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,002944
Packaging Volume PL4	0,6864
Packaging Weight PL1	1,4
Packaging Weight PL4	245
Packaging Width PL1	160
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com