


Uponor RS coupling RS2-RS2

1029144

- Made of tin-plated brass

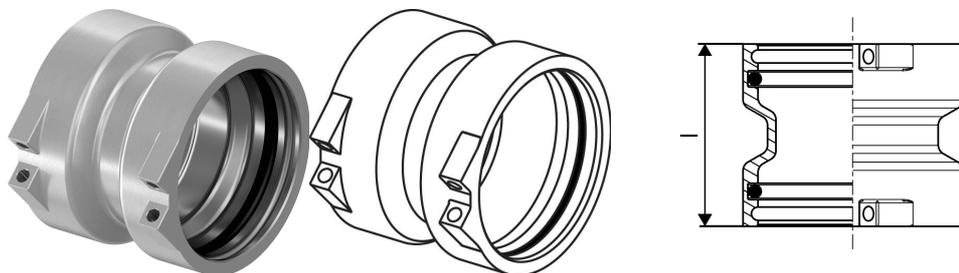

Application information Uponor RS coupling

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS coupling RS2-RS2

1029144

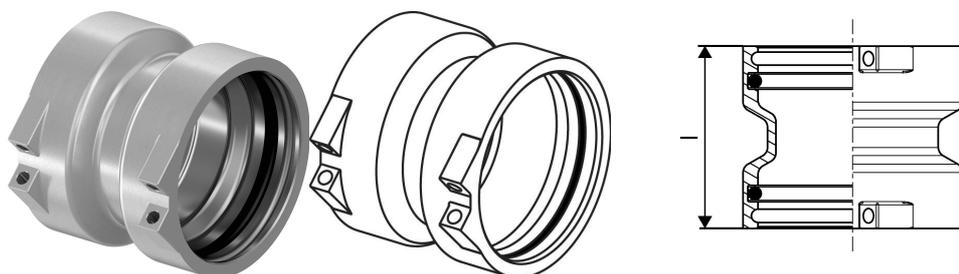

Product code

Item no EAN	4021598106819
Item no GF	35001029144
Item no GTIN	04021598106819
Item no LVI	1720809
Item no NRF	5071218
Item no RSK	1899480
Item no VVS	045456112

Dimensions

Item Unit Height	60
Item Unit Length	70
Item Unit Weight	0,351
Item Unit Width	70
Item_UOM	pce

Measurements

LENGTH_L	58
----------	----

Packaging

Packaging GTIN PL1	06414905263851
Packaging GTIN PL4	06414905263868
Packaging Height PL1	80
Packaging Height PL4	680
Packaging Length PL1	140
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0011088

Packaging Volume PL4	0,6528
Packaging Weight PL1	0,41
Packaging Weight PL4	195,165
Packaging Width PL1	99
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com