


## Uponor RS coupling RS3-RS3

**1029145**

- Made of tin-plated brass

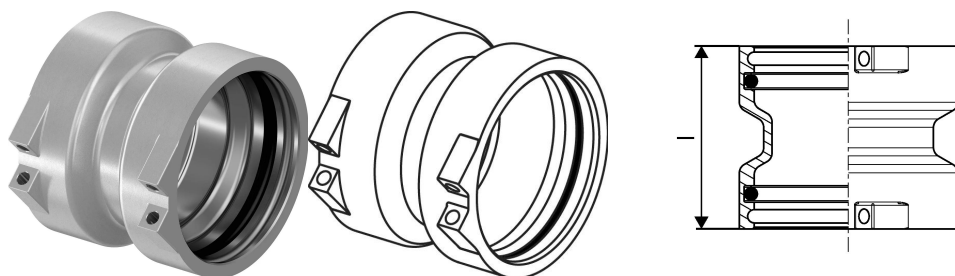

### Application information Uponor RS coupling

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS coupling RS3-RS3

1029145

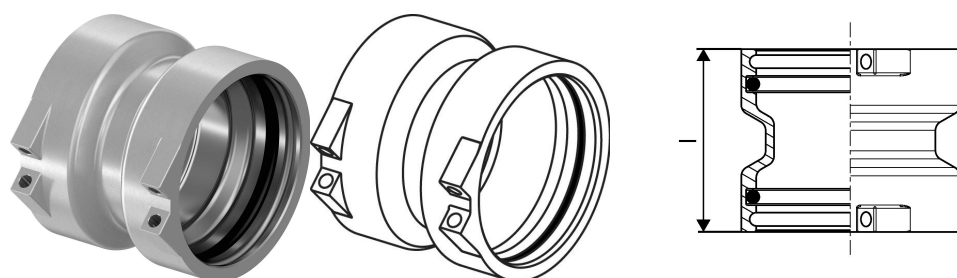

### Product code

Item no EAN	4021598106826
Item no GF	35001029145
Item no GTIN	04021598106826
Item no LVI	1720810
Item no NRF	5071219
Item no RSK	1899481
Item no VVS	045456114

### Dimensions

Item Unit Height	63
Item Unit Length	101
Item Unit Weight	0,73
Item Unit Width	101
Item_UOM	pce

### Measurements

LENGTH_L	58
----------	----

### Packaging

Packaging GTIN PL1	06414905439515
Packaging GTIN PL4	06414905491421
Packaging Height PL1	70
Packaging Height PL4	600
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001365

Packaging Volume PL4	0,576
Packaging Weight PL1	0,8
Packaging Weight PL4	378,904
Packaging Width PL1	130
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com