
Product data sheet



GF Uponor RS reducer RS3-RS2

1029146

- Made of tin-plated DR brass (lead-free)
- Reducer from RS3 to RS2 including 1 lock pin.

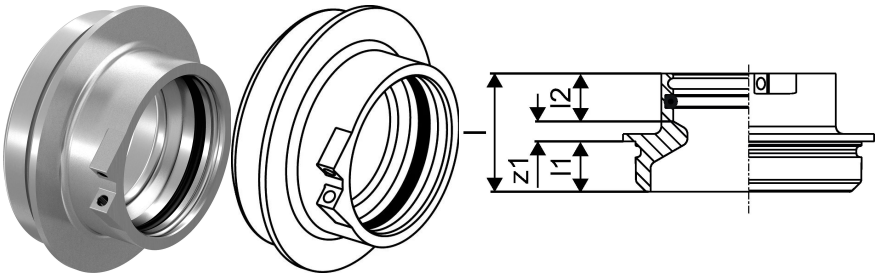

Application information GF Uponor RS reducer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor RS reducer RS3-RS2

1029146

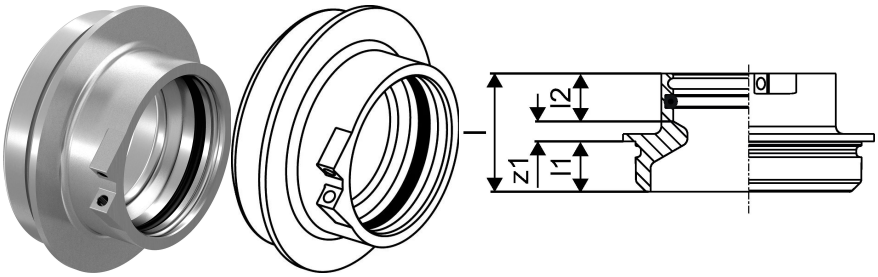

Product code

Item no EAN	4021598106833
Item no GF	35001029146
Item no GTIN	04021598106833
Item no LVI	1720817
Item no NRF	5071227
Item no RSK	1899482
Item no VVS	045456180

Dimensions

Item Unit Height	47
Item Unit Length	100
Item Unit Weight	0,68
Item Unit Width	100
Item_UOM	pce

Measurements

LENGTH_L	47
Length (l1)	20
Length (l2)	19
z1	8

Packaging

Packaging GTIN PL1	06414905263875
Packaging GTIN PL4	06414905263882
Packaging Height PL1	130
Packaging Height PL4	715
Packaging Length PL1	155
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0014105
Packaging Volume PL4	0,6864
Packaging Weight PL1	0,75
Packaging Weight PL4	360
Packaging Width PL1	70
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+