


Uponor RS reducer RS3-RS2

1029146

- Made of tin-plated brass
- Reducer from RS3 to RS2 including 1 lock pin.

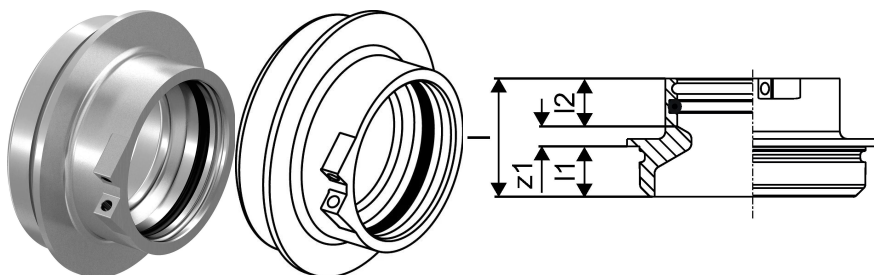

Application information Uponor RS reducer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor RS reducer RS3-RS2

1029146

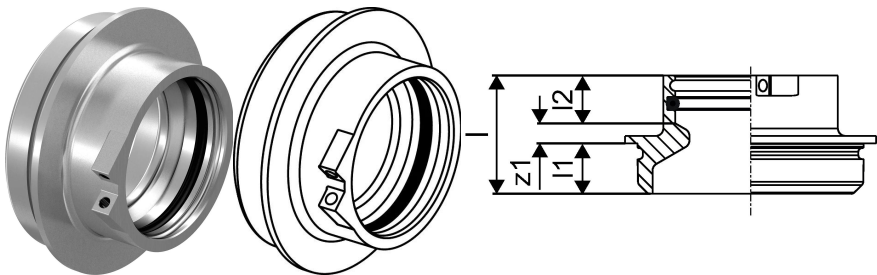

Technical data

Item (unit of measurement)	pce
Item no VVS	045456180
Item no LVI	1720817
Item no NRF	5071227
Length (l)	47 mm
Length (l1)	20 mm
Length (l2)	19 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com