


Uponor S-Press elbow 45° PPSU 75-75

1032880

- Fast installation with easy bevel and without calibration
- Colour code

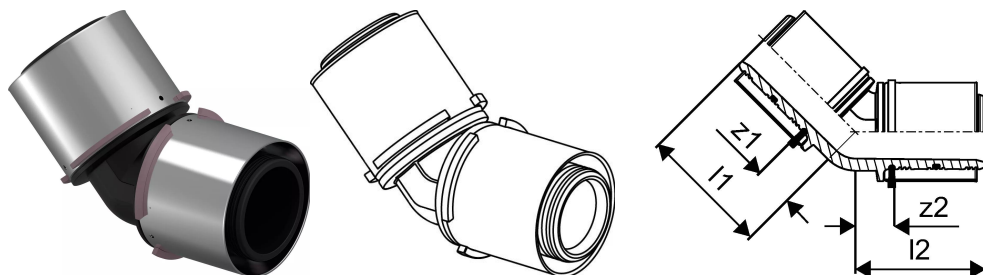

Application information Uponor S-Press elbow 45° PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
 - DVGW
 - AENOR

Uponor S-Press elbow 45° PPSU 75-75

1032880

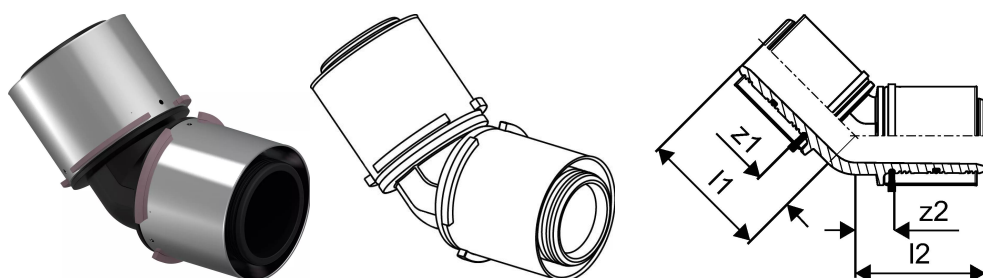

Product code

Item no EAN	6414905220793
Item no GF	35001032880
Item no GTIN	06414905220793
Item no LVI	1720117
Item no NOBB	54938974
Item no NRF	5114362
Item no RSK	1896576
Item no VVS	087433175

Dimensions

Item Unit Height	84
Item Unit Length	173
Item Unit Weight	0,547
Item Unit Width	130
Item_UOM	pce

Measurements

Length (l1)	86,3
Length (l2)	86,3
z1	25,4
Z2	25,4

Packaging

Packaging GTIN PL1	06414905281053
Packaging GTIN PL4	06414905281077
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	182
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	192
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00368823
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,647
Packaging Weight PL4	149,224
Packaging Width PL1	193
Packaging Width PL4	800

Documents

[Page with all documents](#) 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com