


## Uponor S-Press coupling PPSU 63-63

1032881

- Fast installation with easy bevel and without calibration
- Colour code

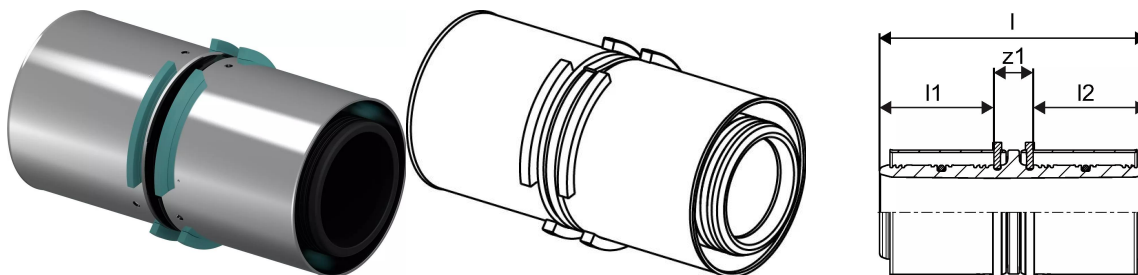

### Application information Uponor S-Press coupling PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press coupling PPSU 63-63

1032881

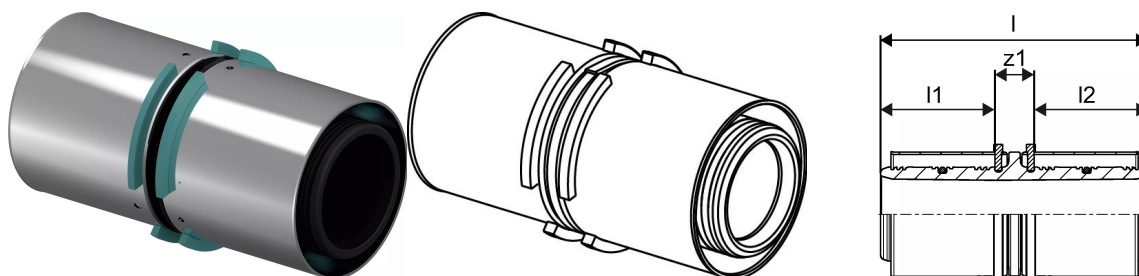

## Technical data

| Item (unit of measurement) | pce       |
|----------------------------|-----------|
| Item no VVS                | 087452163 |
| Item no LVI                | 1720118   |
| Item no NRF                | 5114363   |
| Length (l1)                | 61 mm     |
| Length (l2)                | 61 mm     |
| Packaging Quantity PL1     | 1         |
| Packaging Quantity PL4     | 384       |

## Documents

[Page with all documents](#)

## Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E [info@uponor.com](mailto:info@uponor.com)  
F +358 (0)20 129 2841

[www.uponor.com](http://www.uponor.com)