


Uponor S-Press coupling PPSU 63-63

1032881

- Fast installation with easy bevel and without calibration
- Colour code

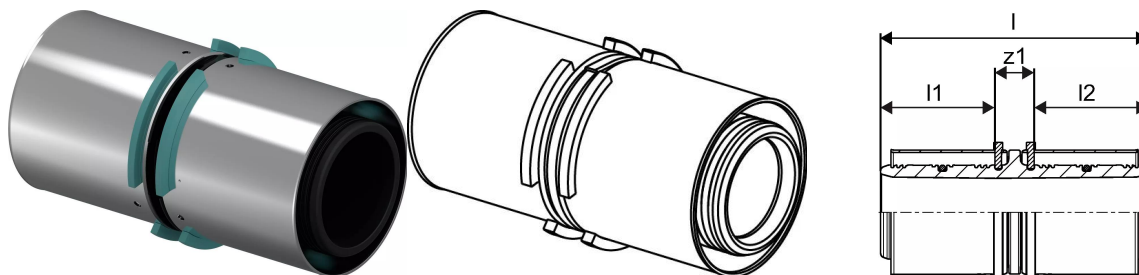

Application information Uponor S-Press coupling PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press coupling PPSU 63-63

1032881

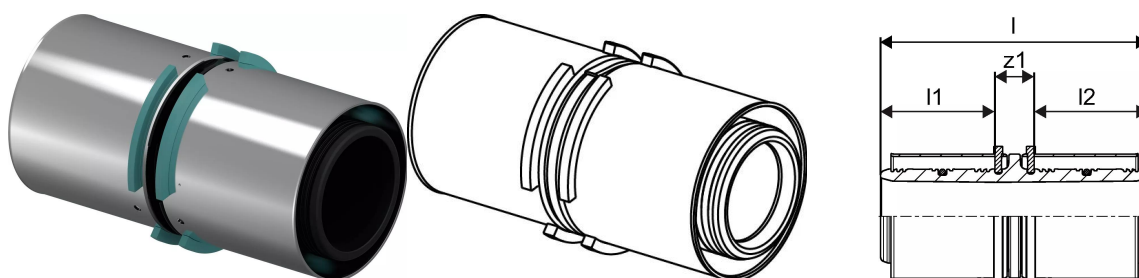

Technical data

Item no EAN	6414905220809
Item no GTIN	06414905220809
Item no VVS	087452163
RSK no.	1899460
Item no NRF	5114363
Item no LVI	1720118
Item (unit of measurement)	pce
Length (l1)	61 mm
Length (l2)	61 mm
Packaging Quantity 1	1
Packaging Quantity 4	384
Packaging GTIN PL1	06414905295685
Packaging GTIN PL4	06414905295692
Item Unit Height	72 mm
Item Unit Weight	0,35 mm
Item Unit Width	72 mm

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com