


Uponor S-Press coupling PPSU 75-75

1032882

- Fast installation with easy bevel and without calibration
- Colour code

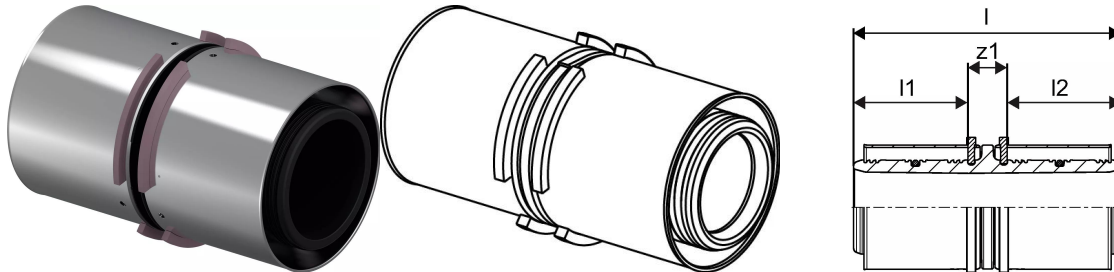

Application information Uponor S-Press coupling PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press coupling PPSU 75-75

1032882

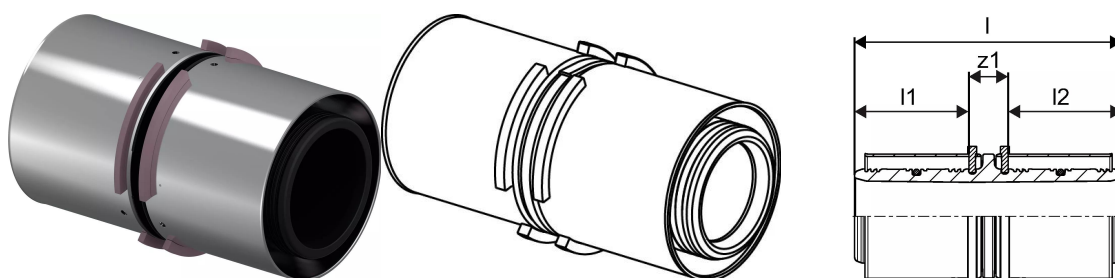

Technical data

Item no EAN	6414905220816
Item no GTIN	06414905220816
Item no VVS	087452175
RSK no.	1899461
Item no NRF	5114364
Item no LVI	1720119
Item (unit of measurement)	pce
Length (l)	137 mm
Length (l1)	61 mm
Length (l2)	61 mm
Packaging Quantity 1	1
Packaging Quantity 4	384
Packaging GTIN PL1	06414905281237
Packaging GTIN PL4	06414905281244
Item Unit Height	84 mm
Item Unit Weight	0,488 kg
Item Unit Width	84 mm

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com