


## Uponor S-Press reducer PPSU 63-40

1032883

- Fast installation with easy bevel and without calibration
- Colour code

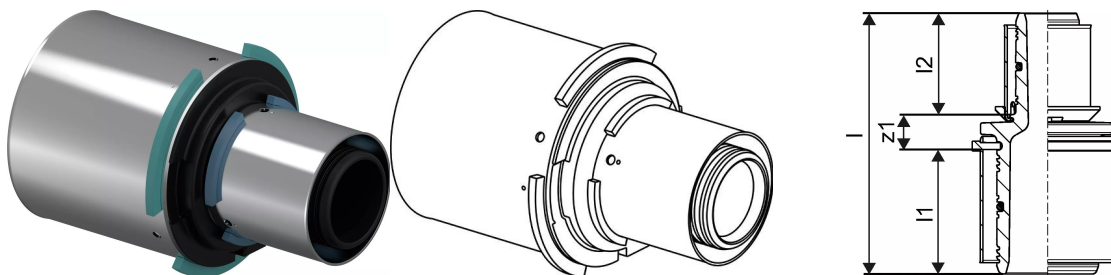

### Application information Uponor S-Press reducer PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.


#### Certification

- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press reducer PPSU 63-40  
1032883

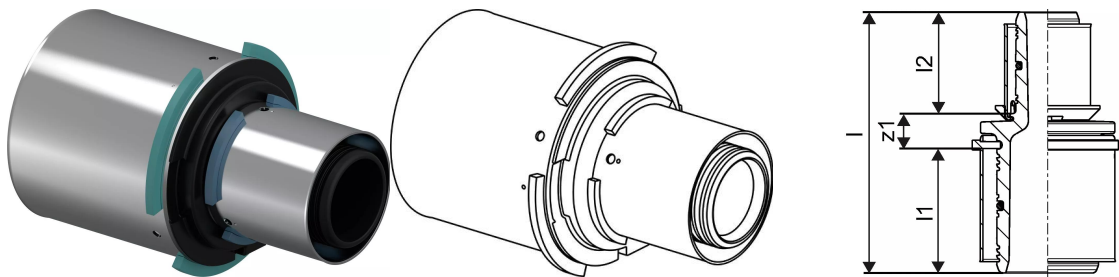

Technical data

Item (unit of measurement)	pce
Item no VVS	087454163
Item no LVI	1720120
Item no NRF	5114365
Length (l)	115 mm
Length (l1)	61 mm
Length (l2)	37 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	384

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com