


Uponor S-Press reducer PPSU 75-63

1032886

- Fast installation with easy bevel and without calibration
- Colour code

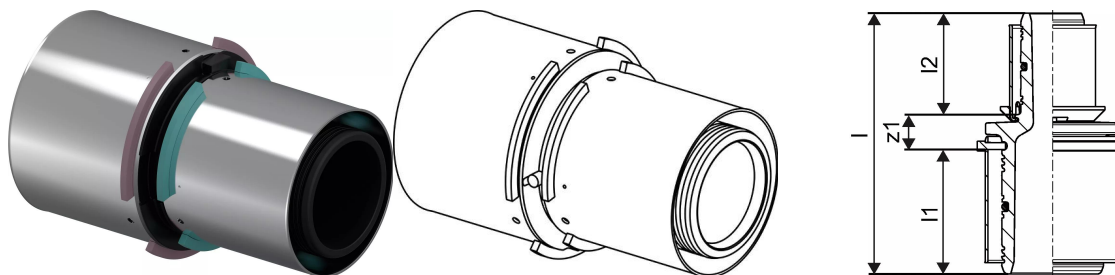

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press reducer PPSU 75-63
1032886

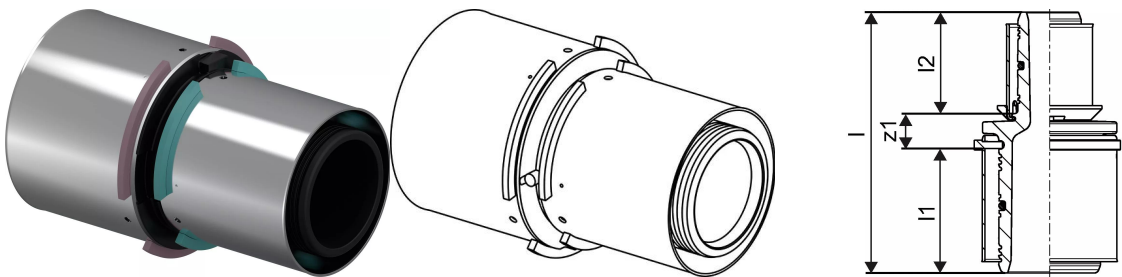

Technical data

| Item (unit of measurement) | pce |
|----------------------------|-----------|
| Item no VVS | 087455175 |
| Item no LVI | 1720152 |
| Item no NRF | 5114368 |
| Length (l) | 137 mm |
| Length (l1) | 61 mm |
| Length (l2) | 59 mm |
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL4 | 384 |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com