


## Uponor S-Press tee PPSU 75-75-75

**1032888**

- Fast installation with easy bevel and without calibration
- Colour code

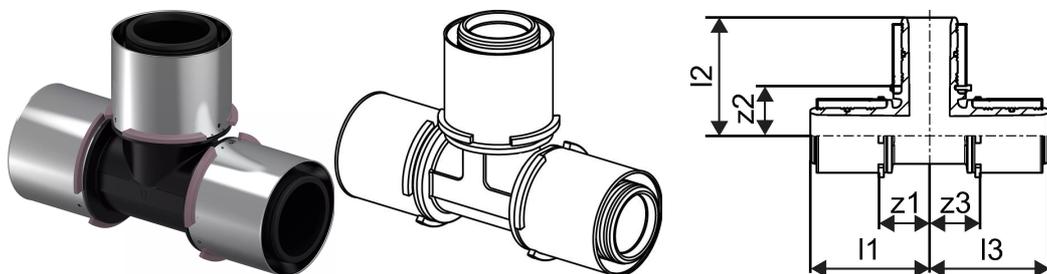

### Application information Uponor S-Press tee PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press tee PPSU 75-75-75

1032888

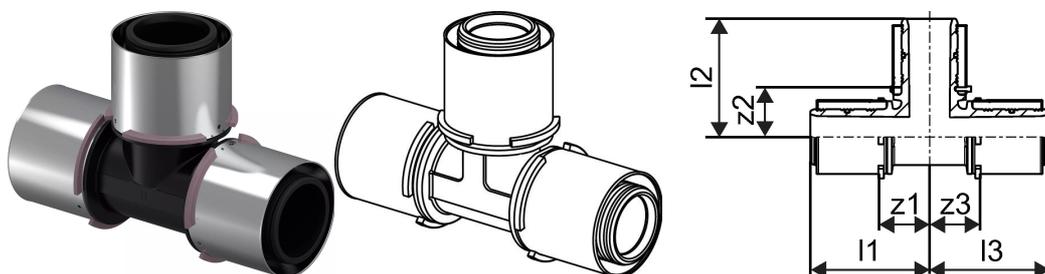

### Product code

Item no EAN	6414905220878
Item no GF	35001032888
Item no GTIN	06414905220878
Item no LVI	1720157
Item no NOBB	54939057
Item no NRF	5114371
Item no RSK	1808042
Item no VVS	087442175

### Dimensions

Item Unit Height	84
Item Unit Length	215
Item Unit Weight	0,941
Item Unit Width	151
Item_UOM	pce

### Measurements

Length (I1)	107,5
Length (I2)	107,4
Length (I3)	107,5
z1	46,6
Z2	46,5
Z3	46,6

### Packaging

Packaging GTIN PL1	06414905281299
Packaging GTIN PL4	06414905281305
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	224

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	150
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0037632
Packaging Volume PL4	0,72576
Packaging Weight PL1	1,061
Packaging Weight PL4	184,15
Packaging Width PL1	160
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)