


Uponor S-Press tee reducer PPSU 63-40-63

1032891

- Fast installation with easy bevel and without calibration
- Colour code

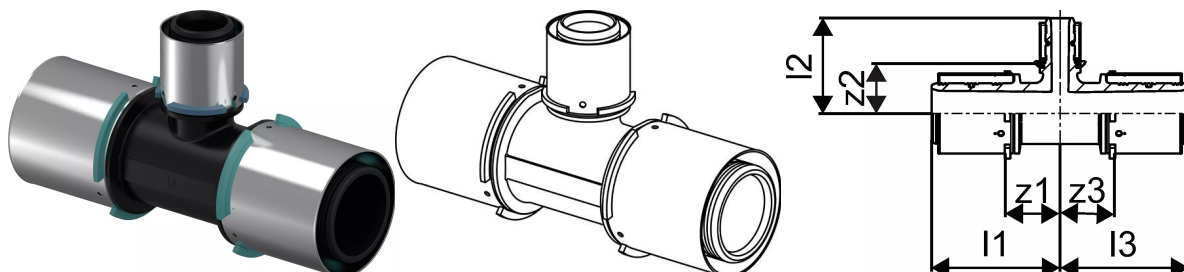

Application information Uponor S-Press tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer PPSU 63-40-63

1032891

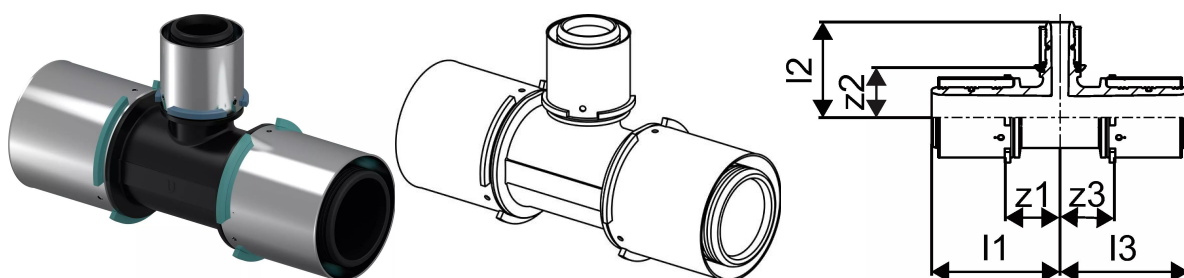

Technical data

Item (unit of measurement)	pce
Item no VVS	087442162
Item no LVI	1720160
Item no NRF	5114374
Length (l1)	101 mm
Length (l2)	79 mm
Length (l3)	101 mm
Z-measurement z2	40 mm
Z-measurement z3	40 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	150

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com