


Uponor S-Press composite tee reducer PPSU 75-32-75

1032892

- Fast installation with easy bevel and without calibration
- Colour code

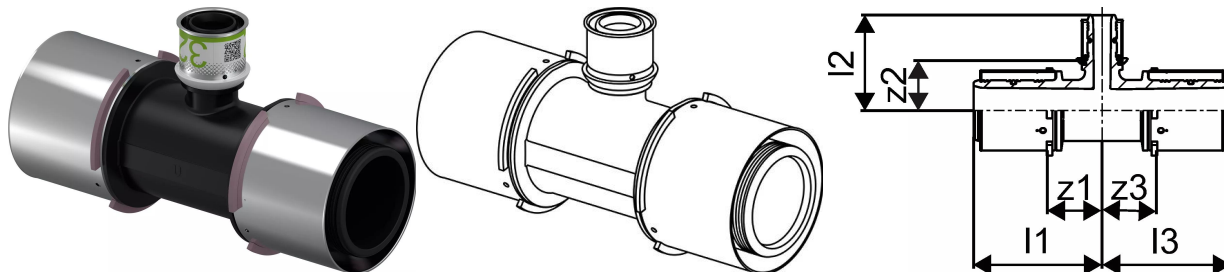

Application information Uponor S-Press composite tee reducer PPSU

Specification

- Fixed stainless steel press sleeve with inspection windows
- Precise jaw location
- Unique press indicator
- Easy size identification
- Unpressed leak-path safety feature
- Fast

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

Certification

- WRAS
- DVGW
- KIWA

Uponor S-Press composite tee reducer PPSU 75-32-75

1032892

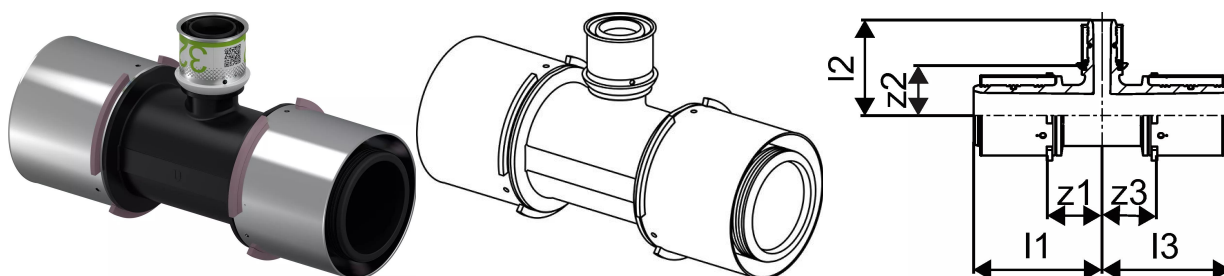

Technical data

| | |
|----------------------------|--------|
| Item Quantity 1 | 1 |
| Item Quantity 2 | 150 |
| Item (unit of measurement) | pce |
| Length (l1) | 108 mm |
| Length (l2) | 74 mm |
| Length (l3) | 108 mm |
| Z-measurement z1 | 47 mm |
| Z-measurement z2 | 45 mm |
| Z-measurement z3 | 47 mm |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com