


Uponor S-Press tee reducer PPSU 75-50-75

1032894

- Fast installation with easy bevel and without calibration
- Colour code

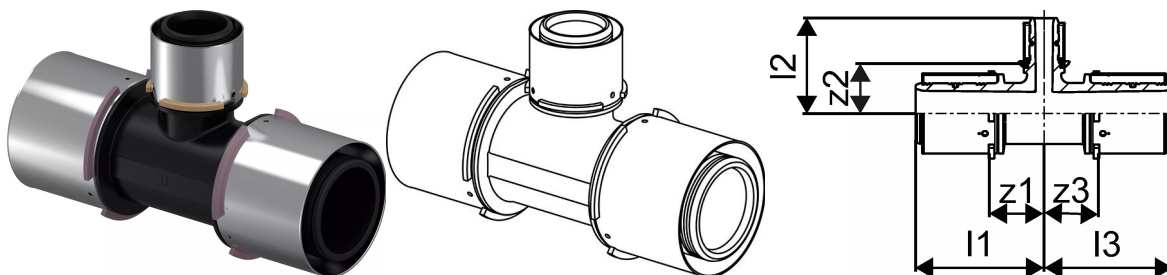

Application information Uponor S-Press tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer PPSU 75-50-75

1032894

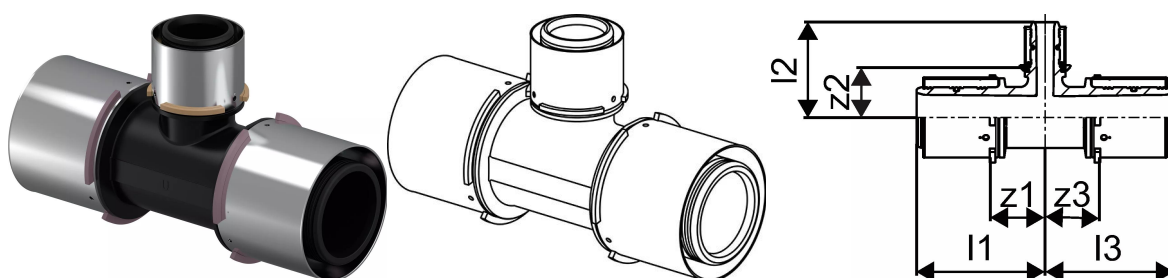

Technical data

Item (unit of measurement)	pce
Item no VVS	087442172
Item no LVI	1720165
Item no NRF	5114377
Length (l1)	108 mm
Length (l2)	86 mm
Length (l3)	108 mm
Z-measurement z2	49 mm
Z-measurement z3	47 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	150

Documents

[Page with all documents](#)


Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com