Product data sheet



GF Uponor Aqua Pipe natural Aenor PN6 40x3,7 50m

1033417

- Material: PE-Xa
- AENOR certificate only
- Operating pressure 6 bar
- In coils

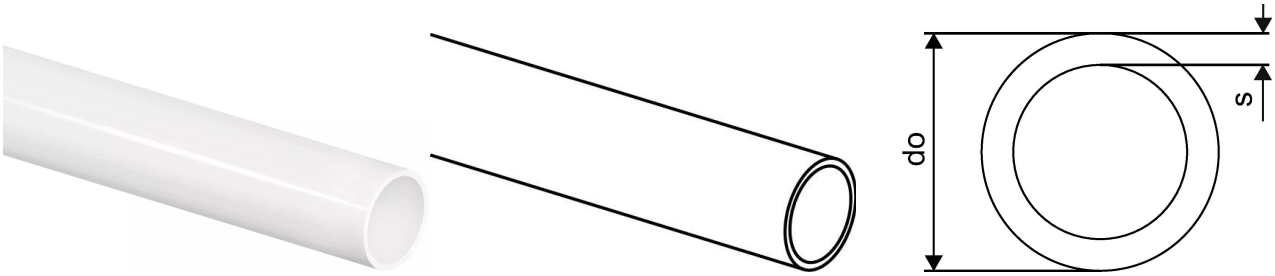

Application information GF Uponor Aqua Pipe natural Aenor PN6

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural Aenor PN6 40x3,7 50m

1033417

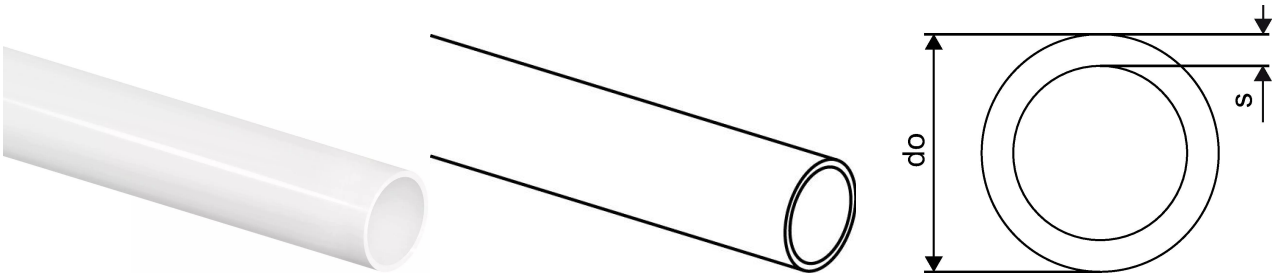

Product code

Item no EAN	7321500041151
Item no GF	35001033417
Item no GTIN	07321500041151

Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,46
Item Unit Width	40
Item_UOM	m

Measurements

Outer Diameter_do	40
Wall thickness_s	3,7

Packaging

Packaging GTIN PL1	06414905265534
Packaging GTIN PL4	06414905265541
Packaging Height PL1	900
Packaging Height PL4	1860
Packaging Length PL1	900
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	250
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,2997
Packaging Volume PL4	1,7856

Packaging Weight PL1	23
Packaging Weight PL4	141
Packaging Width PL1	370
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+