


Uponor Aqua Pipe natural Aenor PN6 40x3,7 50m

1033417

- Material: PE-Xa
- AENOR certificate only
- Operating pressure 6 bar
- In coils

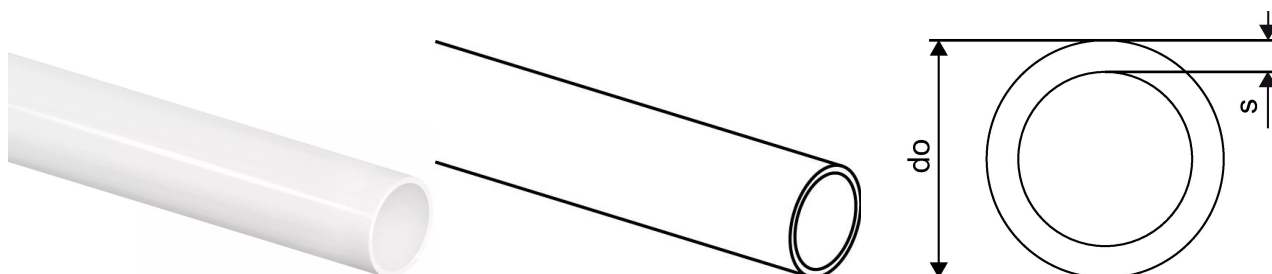

Application information Uponor Aqua Pipe natural Aenor PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural Aenor PN6 40x3,7 50m

1033417

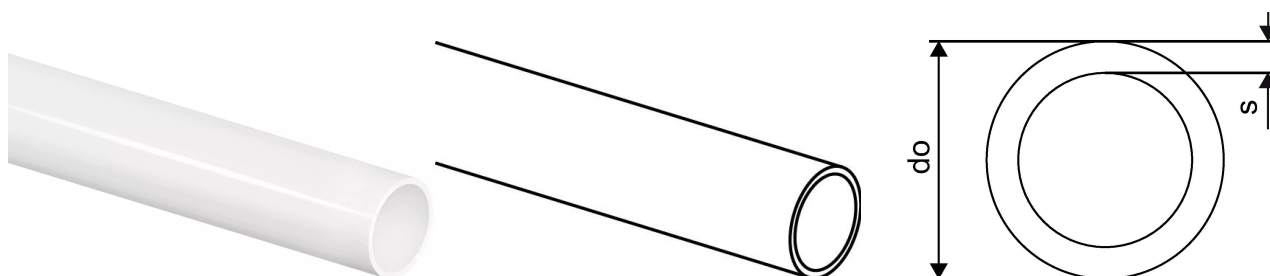

Product code

Item no EAN	7321500041151
Item no GF	35001033417
Item no GTIN	07321500041151

Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,46
Item Unit Width	40
Item_UOM	m

Measurements

Outer Diameter_do	40
Wall thickness_s	3,7

Packaging

Packaging GTIN PL1	06414905265534
Packaging GTIN PL4	06414905265541
Packaging Height PL1	900
Packaging Height PL4	1860
Packaging Length PL1	900
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	250
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,2997
Packaging Volume PL4	1,7856
Packaging Weight PL1	23
Packaging Weight PL4	141

Packaging Width PL1	370
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com